

PERFORMANCE THAT SEEMS

Unreal

PRODUCT CATALOG ♦ SUMMER 2025

♦ RF, MICROWAVE & mmWAVE COMPONENTS ♦ BARE DIE
♦ SURFACE MOUNT ♦ CONNECTORIZED ♦ WAVEGUIDE



Available with expert technical
support and guidance from



At Marki Microwave, we empower our customers to **design faster, simplify production, eliminate complexity, and shatter performance barriers**. We achieve this through intensive research, rigorous product development, and advanced, carefully controlled production.

PERFORMANCE

By combining time-honored fabrication and assembly techniques with a modern design approach, we can push the technological boundaries of broadband RF and microwave components like never before. With proprietary innovations such as our T3 Mixer[®] line and high isolation bridge power combiners, and an expanding portfolio of MMIC devices, we seek to provide the most comprehensive selection of high performance microwave components in the world.



HIGH FREQUENCY OPERATION


High frequencies offer advantages of more contiguous bandwidth supporting high throughput systems, or smaller wavelength signals that enable high resolution imaging and RADAR solutions. Developing products at mmWave and sub-THz frequencies requires attention to the smallest detail and 3D simulations of the entire product, including the environment in which it will be used.

Marki Microwave not only develops MMIC die products but also offers a range of different form factors optimized for high frequency operation.



PACKAGING


As functions become more complex it is necessary to consider how the role of packaging can affect the design-in-process. We simplify product designs with easy-to-use packages that allow the MMIC design to be realized in both surface mount and connectorized forms, as well as solutions that combine multiple functions into one package. By co-designing the die and package, Marki Microwave ensures optimal performance at the board level. From our chip scale packaging (CSP) that delivers up to 90 GHz in a surface mount footprint to the flexible, multi-octave M-Package designs that enable DC to 120 GHz in a connectorized form, Marki Microwave continues to lead in packaging innovation.

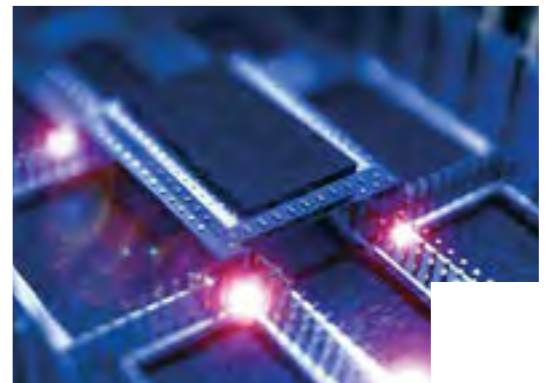

THE TRUSTED LEADER WHEN PERFORMANCE MATTERS

For over 30 years, we've solved the industry's toughest technical problems by creating a robust portfolio of performance shattering RF and microwave products. Founded in 1991 with the goal of developing the best mixers in the industry, today Marki Microwave is a single source for high performance, broadband microwave technology, supporting multiple form factors including die, surface mount, and connectorized solutions for the entire RF block diagram.

Inventing leading-edge products and focusing on key technical challenges facing the evolving RF and microwave industry have been the cornerstones of our success. From simulation and design to packaging, innovation and creativity are part of our DNA, propelling us forward as we continue to challenge the status quo.

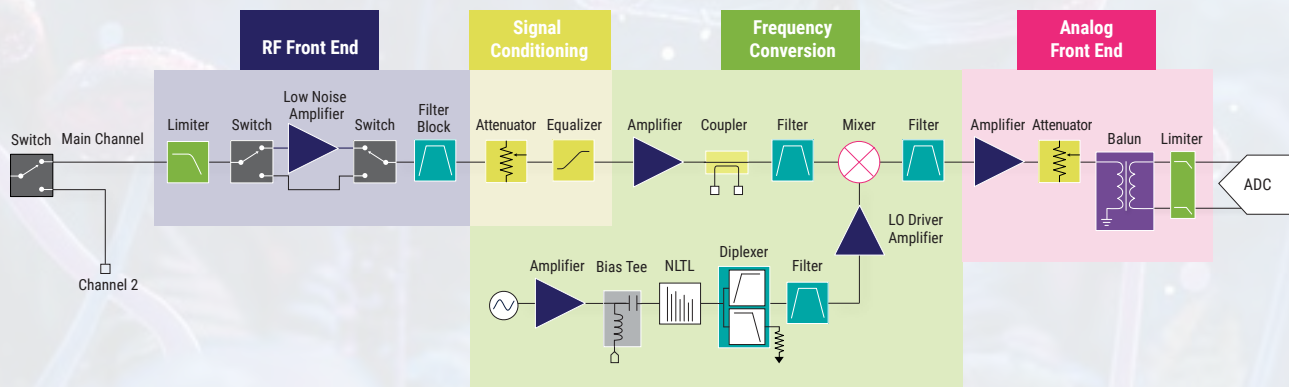

As demands from RF and microwave markets continue to evolve and the supply base consolidates, Marki Microwave remains dedicated to creating a future of limitless possibilities, expanding our catalog and empowering the industry to develop next-generation systems.

SPACE & HI-REL

Since our inception over 30 years ago, Marki Microwave has developed a long and successful history in space applications. Our capabilities cover both space and Hi-Rel for military applications, supporting die, surface mount, connectorized, and waveguide products.

Most of Marki Microwave's catalog can be upscreened in-house to meet the various qualification requirements of GEO and LEO applications, including:

- Earth Observance
- Weather Forecasting
- Communications
- Telescopes
- Military
- Remote Sensing
- GPS

Our test flows support various military and NASA requirements for both active and passive products Marki Microwave builds. The standards define the general requirements as well as the quality assurance and reliability requirements of such components used in military and other high reliability programs. Our qualification plans are designed to meet the following standards:

PACKAGE/TECH	PRODUCT TYPE	STANDARD
Surface Mount Core and Wire	Hybrid Baluns, T3 Mixers	MIL STD 981
Bare Die	Active or passive component in Marki catalog	MIL PRF 38534
Non-Hermetic Plastic Surface Mount	Active or passive component in Marki catalog	NASA EEE-INST-002
Non-Hermetic Ceramic Surface Mount	Active or passive component in Marki catalog	MIL PRF 38535



Marki Microwave has successfully qualified the parts below, demonstrating our commitment to delivering high performance RF solutions for the most demanding applications.

Part Number	Product Description	Package	Screen Level
BALB-0009SMG -01/-02	Broadband Balun 500 kHz - 9 GHz	SMT	B
BALHB-0003SM-02	Broadband Balun 500 kHz - 3 GHz	SMT	B
BALHB-0006SM-02	Broadband Balun 500 kHz - 6 GHz	SMT	B
BALHB-0009SM-01	Broadband Balun 500 kHz - 9 GHz	SMT	B
BALS-0003SMG -01/-02	Broadband Balun 500 kHz - 3 GHz	SMT	S
BALS-0006SMG -01/-02	Broadband Balun 500 kHz - 6 GHz	SMT	S
MFBCX-12PSM-01	MMIC Bandpass Filter 17.2 - 23.2 GHz	SMT	Custom Screening
MFBPX-8PSM-01	MMIC Bandpass Filter 10.4 - 13.8 GHz	SMT	Custom Screening
MM1H-1044LCH-2	MMIC Mixer RF 10 - 44 GHz	Die	H
MM1H-0212HCH-2	MMIC Mixer RF 2 - 12 GHz,	Die	H
MM1H-0312HCH-2	MMIC Mixer RF 3 - 12 GHz	Die	H
MM1H-0320LCH-2	MMIC Mixer RF 3 - 20 GHz	Die	H
MM1H-0626HCH-2	MMIC Mixer RF 6 - 26.5 GHz	Die	H
MM1H-1044HCH-2	MMIC Mixer RF 9 - 44 GHz	Die	H
MM1H-1044LCH-2	MMIC Mixer RF 9 - 44 GHz	Die	H
MM1H-1140HCH-2	MMIC Mixer RF 11 - 40 GHz	Die	H
MM1H-1857LCH-2	MMIC Mixer RF 18 - 57 GHz	Die	H
MM1H-2567LCH-2	MMIC Mixer RF 25 - 67 GHz	Die	H
MM1K-0320LCH-2	MMIC Mixer RF 3 - 20 GHz	Die	K
MM1K-0626HCH-2	MMIC Mixer RF 6 - 26.5 GHz	Die	K
MM1K-0626SCH -2/-01	MMIC Mixer RF 6 - 26.5 GHz	Die	K
MM1K-0832HCH-2	MMIC Mixer RF 8 - 32 GHz	Die	K
MM1K-1044HCH-2	MMIC Mixer RF 9 - 44 GHz	Die	K
MM1K-1044LCH -2/-01	MMIC Mixer RF 9 - 44 GHz	Die	K
MM1K-1857HCH-2	MMIC Mixer RF 18 - 57 GHz	Die	K
MM1K-2567LCH -2/-01	MMIC Mixer RF 25 - 67 GHz	Die	K
MM2H-0530HCH-2	MMIC Mixer RF 5-30 GHz	Die	H
MM2K-0530HCH-2	MMIC Mixer RF 5-30 GHz	Die	K
MM2K-0530LCH-2	MMIC Mixer RF 5-30 GHz	Die	K
MMDK-1030HCH	MMIC Doubler output 10 - 30 GHz	Die	K
MT3HH-0113LCH-2	MMIC Mixer RF 1.5 - 13 GHz	Die	H
NLTL-6794CH-01	MMIC NLTL 30 GHz	Die	Custom Screening

We currently stock space qualified parts with an optional data pack. These parts ship from stock and provide our customers with shorter lead times and reduced overall program costs.

Space Part Number	COTS Part Number	Description	Package	Class	ECCN
MM1H-1140HCH-2	MM1-1140HCH-2	MMIC Mixer RF 11 - 40 GHz +15 dBm, Chip I2	Die	H	EAR99
MM1K-2567LCH	MM1-2567LCH-2	MMIC Mixer RF 25 - 67 GHz +10 dBm, Chip I2	Die	K	EAR99
MM1K-0626SCH	MM1-0626SCH-2	MMIC Mixer RF 6 - 26.5 GHz +18 dBm	Die	K	EAR99
MM2K-0530LCH-2	MM2-0530LCH-2	MMIC Mixer RF 5-30 GHz +9 to +17 dBm	Die	K	EAR99

In addition to standard qualifications, Marki Microwave can develop custom solutions for nearly any project. Please contact support@markimicrowave.com if your needs differ from our standard qualification plans. We are constantly expanding our portfolio of space qualified products to cover the complete RF signal chain.

TABLE OF CONTENTS

■ WAVEGUIDE

Couplers.....	8
Detectors	8
Isolators.....	8
Level Set Attenuators.....	8
Multipliers	8
Fixed Attenuators	9
Power Dividers	10
Terminations	10
Waveguide Twists	10
Waveguide Bends	11
Mixers	11
Waveguide Straights.....	12

■ CONNECTORIZED

Adapters, High Performance.....	13
Amplifiers, Driver.....	13
Amplifiers, Gain Block and Low Noise.....	13
Attenuators, Precision-Grade	14
Bias Tees	14
DC Blocks, Broadband	14
Baluns, Passive	15
Pulse Inverters, Broadband, Fast Rise Time.....	15
Couplers, High Directivity Bridge.....	16
Couplers, Low Loss High Power	16
Couplers, Stripline Directional	16
Couplers, Elite Stripline Directional.....	17
Couplers, Dual Directional	17
Couplers, Pick-Off Tees	17
Couplers, Hybrid.....	17
Diplexers	18
Equalizers, Positive-Slope.....	18
Fixed Filters, Lowpass	18
Fixed Filters, Highpass.....	18
Fixed Filters, Bandpass.....	18
Limiters	19
IQ Mixers.....	19
Mixers, Double Balanced	19
Mixers, Triple Balanced.....	20
Passive Multipliers and Non Linear Transmission Lines.....	20
Active Multipliers	20
Power Dividers, High Isolation	21
Power Dividers, Wilkinson 1:2	21
Power Dividers, Wilkinson 1:3	21
Power Dividers, Wilkinson 1:4	22
Power Dividers, Resistive 1:2	22
Terminations	22
Thumbwheel.....	22

■ SURFACE MOUNT

Amplifiers, Driver	23
Amplifiers, Gain Block and Low Noise	24
Attenuators	25
Baluns, Active	26
Baluns, Passive	26
Bias Tees	27
Couplers, Directional	27
Couplers, Hybrid	27
Diplexers & Quadplexers	27
Equalizers, Positive Gain Slope	28
Configurable Filters, Tunable	28
Fixed Filters, Lowpass	28
Fixed Filters, Highpass	29
Fixed Filters, Reflectionless	29
Fixed Filters, Bandpass	30, 31, 32
Limiters	32
IQ Mixers	33
IQ Mixers, Integrated Drive	33
Mixers, Double Balanced	33
Mixers, Triple Balanced	34
Mixers, Integrated Drive	34
Active Doubler	34
Passive Multipliers and Non Linear Transmission Lines	34
Power Dividers, 1:2	35
Power Dividers, 1:4	35
Switches	35

■ BARE DIE

Amplifiers, Driver	36
Amplifiers, Gain Block and Low Noise	36
Attenuators	37
Baluns, Passive	37
Couplers, Pick-Off Tees	38
Couplers, Hybrid	38
Diplexers	38
Equalizers, Positive Gain Slope	38
Fixed Filters, Lowpass	39
Fixed Filters, Highpass	39
Fixed Filters, Reflectionless	39
Fixed Filters, Bandpass	40, 41
Limiters	42
IQ Mixers	42
Mixers, Double Balanced	42
Mixers, Triple Balanced	43
Active Doubler	43
Passive Multipliers and Non Linear Transmission Lines	43
Power Dividers, 1:2	43
Switches	43

■ SUFFIX/GLOSSARY

Part Number Decoder	44, 45
---------------------------	--------

WAVEGUIDE

COUPLERS

Part Number	Band (GHz)	Coupling	Directivity TYP. (dB)	Insertion Loss (dB)	Return Loss (dB)	Waveguide Band	Flange	ECCN
C10-2800WG	26.5-40	10	40	0.5	30	WR-28	UG-599/U	EAR99
C10-2200WG	33-50	10	40	0.6	30	WR-22	UG-383/U	EAR99
C10-1900WG	40-60	10	40	0.7	30	WR-19	UG-383/U	EAR99
C10-1500WG	50-75	10	40	1.2	30	WR-15	UG-385/U	EAR99
C10-1200WG	60-90	10	40	1.1	30	WR-12	UG-387/U	EAR99
C10-1000WG	75-110	10	40	1.25	30	WR-10	UG-387/U	EAR99

DETECTORS

Part Number	Band (GHz)	Sensitivity (V/mW)	Flatness (dB)	Operating range (dB)	Flange	ECCN
DET-28PP00WG	26.5-40	1800	+/- 1.5	15 to -40	UG-599/U	EAR99
DET-22PP00WG	33-50	1500	+/- 1.5	15 to -40	UG-383/U	EAR99
DET-19PP00WG	40-60	1500	+/- 2.0	15 to -40	UG-383/U	EAR99
DET-15PP00WG	50-75	1200	+/- 1.5	15 to -40	UG-385/U	EAR99
DET-12PP00WG	60-90	1000	+/- 1.5	15 to -40	UG-387/U	EAR99
DET-10PP00WG	75-110	800	+/- 1.5	15 to -40	UG-387/U	EAR99
DET-08PP00WG	90-140	700	+/- 1.7	15 to -40	UG-387/U	EAR99

ISOLATORS

Part Number	Band (GHz)	Isolation (dB)	Insertion Loss (dB)	Return Loss	Waveguide Band	Flange	ECCN
ISO27-28F00WG	26.5-40	27	1	17.7	WR-28	UG-599/U	EAR99
ISO27-22F00WG	33-50	27	1.3	17.7	WR-22	UG-383/U	EAR99
ISO27-19F00WG	40-60	27	1.5	17.7	WR-19	UG-383/U	EAR99
ISO27-15F00WG	50-75	27	1.6	15.5	WR-15	UG-385/U	EAR99
ISO27-12F00WG	60-90	27	1.7	15.5	WR-12	UG-387/U	EAR99
ISO27-10F00WG	75-110	27	2	15.5	WR-10	UG-387/U	EAR99

LEVEL SET ATTENUATORS

Part Number	Band (GHz)	Attenuation Range (dB)	Return Loss (dB)	Flange	ECCN
ATN35-15LS00WG	50-75	0-35	15	UG-385/U	EAR99
ATN35-12LS00WG	60-90	0-35	15	UG-387/U	EAR99
ATN35-10LS00WG	75-110	0-35	15	UG-387/U	EAR99

MULTIPLIERS

Part Number	Band (GHz)	Output Power dBm	Input Frequency (GHz)	Flange	ECCN
AQA-15F00WG	50-75	13	12.5-18.75	UG-385/U	EAR99
ASA-12F00WG	71-86	12	11.83-14.33	UG-387/U	EAR99
ASA-10F00WG	75-110	10	12.5-18.3	UG-387/U	3A001.b.7.c.3

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

FIXED ATTENUATORS

Part Number	Band (GHz)	Attenuation (dB)	Waveguide Band	Flange	ECCN
ATN00-15FH00WG¹	50-75	0	WR-15	UG-385/U	EAR99
ATN00-15FL00WG¹	50-75	0	WR-15	UG-385/U	EAR99
ATN03-15FH00WG¹	50-75	3	WR-15	UG-385/U	EAR99
ATN03-15FL00WG¹	50-75	3	WR-15	UG-385/U	EAR99
ATN06-15FH00WG¹	50-75	6	WR-15	UG-385/U	EAR99
ATN06-15FL00WG¹	50-75	6	WR-15	UG-385/U	EAR99
ATN10-15FH00WG¹	50-75	10	WR-15	UG-385/U	EAR99
ATN10-15FL00WG¹	50-75	10	WR-15	UG-385/U	EAR99
ATN15-15FH00WG¹	50-75	15	WR-15	UG-385/U	EAR99
ATN15-15FL00WG¹	50-75	15	WR-15	UG-385/U	EAR99
ATN20-15FH00WG¹	50-75	20	WR-15	UG-385/U	EAR99
ATN20-15FL00WG¹	50-75	20	WR-15	UG-385/U	EAR99
ATN25-15FH00WG¹	50-75	25	WR-15	UG-385/U	EAR99
ATN25-15FL00WG¹	50-75	25	WR-15	UG-385/U	EAR99
ATN30-15FH00WG¹	50-75	30	WR-15	UG-385/U	EAR99
ATN30-15FL00WG¹	50-75	30	WR-15	UG-385/U	EAR99
ATN00-12FH00WG¹	60-90	0	WR-12	UG-387/U	EAR99
ATN00-12FL00WG¹	60-90	0	WR-12	UG-387/U	EAR99
ATN03-12FH00WG¹	60-90	3	WR-12	UG-387/U	EAR99
ATN03-12FL00WG¹	60-90	3	WR-12	UG-387/U	EAR99
ATN06-12FH00WG¹	60-90	6	WR-12	UG-387/U	EAR99
ATN06-12FL00WG¹	60-90	6	WR-12	UG-387/U	EAR99
ATN10-12FH00WG¹	60-90	10	WR-12	UG-387/U	EAR99
ATN10-12FL00WG¹	60-90	10	WR-12	UG-387/U	EAR99
ATN15-12FH00WG¹	60-90	15	WR-12	UG-387/U	EAR99
ATN15-12FL00WG¹	60-90	15	WR-12	UG-387/U	EAR99
ATN20-12FH00WG¹	60-90	20	WR-12	UG-387/U	EAR99
ATN20-12FL00WG¹	60-90	20	WR-12	UG-387/U	EAR99
ATN25-12FH00WG¹	60-90	25	WR-12	UG-387/U	EAR99
ATN25-12FL00WG¹	60-90	25	WR-12	UG-387/U	EAR99
ATN30-12FH00WG¹	60-90	30	WR-12	UG-387/U	EAR99
ATN30-12FL00WG¹	60-90	30	WR-12	UG-387/U	EAR99
ATN00-10FH00WG¹	75-110	0	WR-10	UG-387/U	EAR99
ATN00-10FL00WG¹	75-110	0	WR-10	UG-387/U	EAR99
ATN03-10FH00WG¹	75-110	3	WR-10	UG-387/U	EAR99
ATN03-10FL00WG¹	75-110	3	WR-10	UG-387/U	EAR99
ATN06-10FH00WG¹	75-110	6	WR-10	UG-387/U	EAR99
ATN06-10FL00WG¹	75-110	6	WR-10	UG-387/U	EAR99
ATN10-10FH00WG¹	75-110	10	WR-10	UG-387/U	EAR99
ATN10-10FL00WG¹	75-110	10	WR-10	UG-387/U	EAR99
ATN15-10FH00WG¹	75-110	15	WR-10	UG-387/U	EAR99
ATN15-10FL00WG¹	75-110	15	WR-10	UG-387/U	EAR99
ATN20-10FH00WG¹	75-110	20	WR-10	UG-387/U	EAR99
ATN20-10FL00WG¹	75-110	20	WR-10	UG-387/U	EAR99
ATN25-10FH00WG¹	75-110	25	WR-10	UG-387/U	EAR99
ATN25-10FL00WG¹	75-110	25	WR-10	UG-387/U	EAR99
ATN30-10FH00WG¹	75-110	30	WR-10	UG-387/U	EAR99
ATN30-10FL00WG¹	75-110	30	WR-10	UG-387/U	EAR99

¹Low power handles 300 mW, high power handles 3 W with fan cooling

POWER DIVIDERS

Part Number	Band (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR Input	VSWR Outputs	Flange	ECCN
PD20-1500WG	50-75	0.5	20	1.6:1	1.5:1	UG-385/U	EAR99
PD20-1200WG	60-90	0.5	20	1.6:1	1.5:1	UG-387/U	EAR99
PD20-1000WG	75-110	0.5	20	1.6:1	1.5:1	UG-387/U	EAR99

TERMINATIONS

Part Number	Band (GHz)	Return Loss (dB)	Power Handling (W)	Waveguide Band	Flange	ECCN
TW50-28H00WG	26.5-40	30	7	WR-28	UG-599/U	EAR99
TW50-28L00WG	26.5-40	32	5	WR-28	UG-599/U	EAR99
TW50-22H00WG	33-50	30	5	WR-22	UG-383/U	EAR99
TW50-22L00WG	33-50	32	4	WR-22	UG-383/U	EAR99
TW50-19H00WG	40-60	30	3	WR-19	UG-383/U	EAR99
TW50-19L00WG	40-60	32	2	WR-19	UG-383/U	EAR99
TW50-15H00WG	50-75	28	2	WR-15	UG-385/U	EAR99
TW50-15L00WG	50-75	30	1	WR-15	UG-385/U	EAR99
TW50-12H00WG	60-90	28	1.8	WR-12	UG-387/U	EAR99
TW50-12L00WG	60-90	30	0.9	WR-12	UG-387/U	EAR99
TW50-10H00WG	75-110	28	1.2	WR-10	UG-387/U	EAR99
TW50-10L00WG	75-110	30	0.6	WR-10	UG-387/U	EAR99
TW50-08H00WG	90-140	24	contact support	WR-08	UG-387/U	EAR99
TW50-08L00WG	90-140	26	contact support	WR-08	UG-387/U	EAR99

WAVEGUIDE TWISTS

Part Number	Band (GHz)	Twist Angle	Flange	ECCN
WT45-28L00WG	26.5-40	45°	UG-599/U	EAR99
WT45-28R00WG	26.5-40	45°	UG-599/U	EAR99
WT90-2800WG	26.5-40	90°	UG-599/U	EAR99
WT45-22R00WG	33-50	45°	UG-383/U	EAR99
WT45-22L00WG	33-50	45°	UG-383/U	EAR99
WT90-2200WG	33-50	90°	UG-383/U	EAR99
WT90-1900WG	40-60	90°	UG-383/U	EAR99
WT45-19R00WG	40-60	45°	UG-383/U	EAR99
WT45-19L00WG	40-60	45°	UG-383/U	EAR99
WT45-15L00WG	50-75	45°	UG-385/U	EAR99
WT90-1500WG	50-75	90°	UG-385/U	EAR99
WT45-15R00WG	50-75	45°	UG-385/U	EAR99
WT90-1200WG	60-90	90°	UG-387/U	EAR99
WT45-12R00WG	60-90	45°	UG-387/U	EAR99
WT45-12L00WG	60-90	45°	UG-387/U	EAR99
WT45-10R00WG	75-110	45°	UG-387/U	EAR99
WT90-1000WG	75-110	90°	UG-387/U	EAR99
WT45-10L00WG	75-110	45°	UG-387/U	EAR99
WT45-08L00WG	90-140	45°	UG-387/U	EAR99
WT45-08R00WG	90-140	45°	UG-387/U	EAR99
WT90-0800WG	90-140	90°	UG-387/U	EAR99
WT45-06R00WG	110-170	45°	UG-387/U	EAR99
WT45-06L00WG	110-170	45°	UG-387/U	EAR99
WT90-0600WG	110-170	90°	UG-387/U	EAR99

WAVEGUIDE BENDS

Part Number	Band (GHz)	Bend Angle	Flange	ECCN
WE45-2800WG	26.5-40	45°	UG-599/U	EAR99
WE90-2800WG	26.5-40	90°	UG-599/U	EAR99
WH45-2800WG	26.5-40	45°	UG-599/U	EAR99
WH90-2800WG	26.5-40	90°	UG-599/U	EAR99
WE45-2200WG	33-50	45°	UG-383/U	EAR99
WE90-2200WG	33-50	90°	UG-383/U	EAR99
WH45-2200WG	33-50	45°	UG-383/U	EAR99
WH90-2200WG	33-50	90°	UG-383/U	EAR99
WE45-1900WG	40-60	45°	UG-383/U	EAR99
WE90-1900WG	40-60	90°	UG-383/U	EAR99
WH45-1900WG	40-60	45°	UG-383/U	EAR99
WH90-1900WG	40-60	90°	UG-383/U	EAR99
WE45-1500WG	50-75	45°	UG-385/U	EAR99
WE90-1500WG	50-75	90°	UG-385/U	EAR99
WH45-1500WG	50-75	45°	UG-385/U	EAR99
WH90-1500WG	50-75	90°	UG-385/U	EAR99
WE45-1200WG	60-90	45°	UG-387/U	EAR99
WE90-1200WG	60-90	90°	UG-387/U	EAR99
WH45-1200WG	60-90	45°	UG-387/U	EAR99
WH90-1200WG	60-90	90°	UG-387/U	EAR99
WE45-1000WG	75-110	45°	UG-387/U	EAR99
WE90-1000WG	75-110	90°	UG-387/U	EAR99
WH45-1000WG	75-110	45°	UG-387/U	EAR99
WH90-1000WG	75-110	90°	UG-387/U	EAR99
WE45-0800WG	90-140	45°	UG-387/U	EAR99
WE90-0800WG	90-140	90°	UG-387/U	EAR99
WH45-0800WG	90-140	45°	UG-387/U	EAR99
WH90-0800WG	90-140	90°	UG-387/U	EAR99
WE45-0600WG	110-170	45°	UG-387/U	EAR99
WE90-0600WG	110-170	90°	UG-387/U	EAR99
WH45-0600WG	110-170	45°	UG-387/U	EAR99
WH90-0600WG	110-170	90°	UG-387/U	EAR99

MIXERS

Part Number	Band (GHz)	IF (GHz)	Conversion Loss (dB)	L-R Isolation (dB)	ECCN
MXDB-1500WG	50-75	DC-25	7.2	35	EAR99
MXDB-1200WG	60-90	DC-30	7.5	34	EAR99
MXDB-1500WG	75-110	DC-35	9.0	28	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

WAVEGUIDE STRAIGHTS

Part Number	Band (GHz)	Length (inch)	Flange	ECCN
WS-2800100WG	26.5-40	1	UG-599/U	EAR99
WS-2800200WG	26.5-40	2	UG-599/U	EAR99
WS-2800300WG	26.5-40	3	UG-599/U	EAR99
WS-2800600WG	26.5-40	6	UG-599/U	EAR99
WS-2200100WG	33-50	1	UG-383/U	EAR99
WS-220010SWG	33-50	1	UG-599/U	EAR99
WS-2200200WG	33-50	2	UG-383/U	EAR99
WS-220020SWG	33-50	2	UG-599/U	EAR99
WS-2200300WG	33-50	3	UG-383/U	EAR99
WS-220030SWG	33-50	3	UG-599/U	EAR99
WS-2200600WG	33-50	6	UG-383/U	EAR99
WS-220060SWG	33-50	6	UG-599/U	EAR99
WS-1900100WG	40-60	1	UG-383/U	EAR99
WS-190010SWG	40-60	1	UG-599/U	EAR99
WS-1900200WG	40-60	2	UG-383/U	EAR99
WS-190020SWG	40-60	2	UG-599/U	EAR99
WS-1900300WG	40-60	3	UG-383/U	EAR99
WS-190030SWG	40-60	3	UG-599/U	EAR99
WS-1900600WG	40-60	6	UG-383/U	EAR99
WS-190060SWG	40-60	6	UG-599/U	EAR99
WS-1500100WG	50-75	1	UG-385/U	EAR99
WS-1500200WG	50-75	2	UG-385/U	EAR99
WS-1500300WG	50-75	3	UG-385/U	EAR99
WS-1500600WG	50-75	6	UG-385/U	EAR99
WS-1200100WG	60-90	1	UG-387/U	EAR99
WS-1200200WG	60-90	2	UG-387/U	EAR99
WS-1200300WG	60-90	3	UG-387/U	EAR99
WS-1200400WG	60-90	4	UG-387/U	EAR99
WS-1000100WG	75-110	1	UG-387/U	EAR99
WS-1000200WG	75-110	2	UG-387/U	EAR99
WS-1000300WG	75-110	3	UG-387/U	EAR99
WS-1000400WG	75-110	4	UG-387/U	EAR99
WS-0800100WG	90-140	1	UG-387/U	EAR99
WS-0800200WG	90-140	2	UG-387/U	EAR99
WS-0800300WG	90-140	3	UG-387/U	EAR99
WS-0800600WG	90-140	6	UG-387/U	EAR99
WS-0600100WG	110-170	1	UG-387/U	EAR99
WS-0600200WG	110-170	2	UG-387/U	EAR99
WS-0600300WG	110-170	3	UG-387/U	EAR99
WS-0600600WG	110-170	6	UG-387/U	EAR99
WS-0500100WG	140-220	1	UG-387/U	EAR99
WS-0500200WG	140-220	2	UG-387/U	EAR99
WS-0500300WG	140-220	3	UG-387/U	EAR99
WS-0500600WG	140-220	6	UG-387/U	EAR99

CONNECTORIZED

ADAPTERS, High Performance

Part Number	Band (GHz)	VSWR	Description	ECCN
ADPFKFK	DC-40	1.1	2.92mm F to 2.92 mm F	EAR99
ADPMKMK	DC-40	1.1	2.92mm M to 2.92mm M	EAR99
ADPMKFK	DC-40	1.1	2.92mm M to 2.92mm F	EAR99
ADPFVFK	DC-40	1.15	2.4mm F to 2.92 mm F	EAR99
ADPFVMK	DC-40	1.15	2.4mm F to 2.92mm M	EAR99
ADPMVFK	DC-40	1.15	2.4mm M to 2.92 mm F	EAR99
ADPMVMK	DC-40	1.15	2.4mm M to 2.92mm M	EAR99
ADPFVFEV	DC-50	1.15	2.4mm F to 2.4mm F	EAR99
ADPMVMV	DC-50	1.15	2.4mm M to 2.4mm M	EAR99
ADPMVFEV	DC-50	1.15	2.4mm M to 2.4mm F	EAR99
RA40(FM)	DC-40	1.4	2.92M to 2.92F	EAR99
RA50(FM/MM)	DC-50	1.4	2.92M to 2.92F	EAR99

AMPLIFIERS, Driver

Part Number	Band (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
ADM3-00001PD	0.0003-18	37	+23	+31	See Datasheet	120, 120, 100	EAR99
APM-7099PA	0.1-20	14	+25	+24	+8 VC and +7 VB	72	EAR99
ADM3-0022PA	0.01-22	35	+30	+31	See Datasheet	115, 115, 450	EAR99
APM-7098PA	0.1-22	14	+23	+24	+8 VC and +7 VB	44	EAR99
APM-7516PA	1-22	12.5	+23	+33	+5 VC and +5 VB	106	EAR99
ADM1-0026PA	0.005-26.5	12	+20	+25	+3 to +7 VD and -0.3 to 0 VG	165	EAR99
AMM-7473PC	0.4-26.5	16	+25	+34	+5 to +7 VD and -0.7 to -0.6 VG	150	EAR99
APM-6849PA	2-29	11	+21	+21	+7 VC and +7 VB	21	EAR99
ADM2-0035PA	0.1-35	23	+23	+30	+3 to +7 VD and -0.3 to 0 VG	320	EAR99
AMM-7199UC	11-38	20.5	+21	+31	+3 to +4 VD and -0.6 to -0.4 VG	180	EAR99
ADM1-8007APC	2-40	22	+22	+30	+3 to +6 VD and +3 to +6VG	213	EAR99
AMM-7200UC	12-46	18	+21.5	+29	+3 to +4 VD and -0.6 to -0.4 VG	180	EAR99
AMM-6702(UC/UC5)	20-55	24	+21	+27	+3 to +4 VD and -0.6 to -0.4 VG	180/230	EAR99
AMM-8211UC5	22-57	13	+21	+27	+3.5 to +5.5 VB	175	EAR99
AMM-7203UC	30-60	11.5	+16	+21	+1.5 to +3 VD and -0.6 to -0.4 VG	80	EAR99
A-3567UC	35-67	19	+20	+26	+3 to +4 VD and -0.6 to -0.4 VG	300	EAR99
◆ AMM2-0070UH*	DC-70	17	+15	+21	+8 V	108	EAR99
AMM-0001M	45-95	11	+19	-	+1.5 to 4V VD and -1.5V to 0V VG	350	3A001.b.4.e.2
AMM-9893M	45-95	18	+17	-	+3.5 V	360	3A001.b.2.h

AMPLIFIERS, Gain Block and Low Noise

Part Number	Band (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
ADM1-8096PC	0.09-6	22.5	1.5	+23	+35	+5 VD	84	EAR99
ADM-8622PC	0.0003-10	15	2.1	+13	+27	+3.3 VD	42	EAR99
ADM1-8095PC	0.09-10	18	1.6	+18.5	+32	+5 VD	57	EAR99
ADM-8344PC	DC-18	18	1.4	+18	+27	+5 VD	103	EAR99
ADM-8558PC	0.005-20	15	2.2	+14	+23	+6 VD	50	EAR99
ADM-8624PC	0.2-20	10.5	3	+13.5	+26	+5 VD	40	EAR99
ADM-8556PC	6-20	23	1.7	+15	+26	+3 VD	67	EAR99

ATTENUATORS, Precision-Grade

Part Number	Band (GHz)	Attenuation (dB)	Accuracy (dB)	Return Loss (dB)	ECCN
♦ ATN03-0040BH*	DC-40	3	0.3	29	EAR99
ATN06-0040ABH	DC-40	6	0.9	30	EAR99
♦ ATN10-0040BH*	DC-40	10	0.2	29	EAR99
♦ ATN20-0040BH*	DC-40	20	0.3	27	EAR99
ATN06-0067(-2HV/-3HV)	DC-67	6.4	see datasheet	23	EAR99
ATN10-0067(-2HV/-3HV)	DC-67	10.5	see datasheet	22	EAR99
ATN06-00110(-2W/-3W)	DC-110	6.5	see datasheet	20	EAR99
ATN10-00110(-2W/-3W)	DC-110	10.5	see datasheet	20	EAR99

BIAS TEES

Part Number	Band (GHz)	DC Voltage (V)	DC Current (A)	Insertion Loss (dB)	ECCN
BT-0018	0.00004-18	30	0.5	0.6	EAR99
BTN1-0018	0.0005-18	50	1	0.7	EAR99
BTN2-0018	0.003-18	50	2	0.7	EAR99
BT-0025	0.00004-25	30	0.5	0.8	EAR99
BT-0026	0.01-26.5	30	0.5	0.8	EAR99
BT1-0026	0.0002-26.5	50	1	1	EAR99
BT2-0026	0.0002-26.5	50	2	1	EAR99
BTN1-0026	0.0005-26.5	50	1	1	EAR99
BTN2-0026	0.003-26.5	50	2	1	EAR99
BT-0040	0.000004-40	30	0.5	1.5	EAR99
BTN-0040	0.00004-40	30	0.5	1.5	EAR99
BT1-0040	0.0002-40	50	1	1.5	EAR99
BT2-0040	0.0002-40	50	2	1.5	EAR99
BTN1-0040	0.0005-40	50	1	1.5	EAR99
BTN2-0040	0.003-40	50	2	1.5	EAR99
BT-0050	0.0002-50	30	0.5	1.8	EAR99
BTN-0050	0.0002-50	30	0.5	1.8	EAR99
BT1-0050	0.0002-50	50	1	1.5	EAR99
BT2-0050	0.0002-50	50	2	1.5	EAR99
BTN1-0050	0.0005-50	50	1	1.5	EAR99
BTN2-0050	0.003-50	50	2	1.5	EAR99
BT-0065	0.000004-65	30	0.5	1.8	EAR99
BTN-0065	0.00004-65	30	0.5	2.0	EAR99

DC BLOCKS, Broadband

Part Number	Band (GHz)	Loss (dB)	DC Voltage (V)	Rise Time (ps)	Group Delay (ps)	ECCN
DCZ(M-F)29(M-F)29	.000004-40	0.7	16	6	75	EAR99
DCZ(M-F)24(M-F)24	.000004-50	0.7	16	6	75	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

BALUNS, Passive

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Turns Ratio	Total Insertion Loss as a Mode Converter (dB)	ECCN
BAL-0003	0.0002-3	0.05	1	8	1:2	4	EAR99
BALH-0003	0.0002-3	0.1	1	7	1:1	1.5	EAR99
BAL-0006	0.0002-6	0.05	1	9	1:2	4.5	EAR99
BALH-0006	0.0002-6	0.1	1	8	1:1	2.5	EAR99
BAL-0010	0.0002-10	0.2	2	9	1:2	5	EAR99
BALH-0010	0.0002-10	0.2	2	8	1:1	2.5	EAR99
BAL-0106	1.2-6	0.1	2	6	1:2	0.6	EAR99
BAL-0212	2.6-12	0.1	2	6	1:2	1	EAR99
BAL-0520	5-20	0.2	3	6	1:2	1.5	EAR99
EBAL-0026	0.01-26	1.0	1	3	1:2	3	EAR99
BAL-0026	0.0003-26.5	0.5	3	24	1:2	2.5	EAR99
BAL-0036	0.0003-36	0.5	3	24	1:2	3	EAR99
EBAL-0040	0.01-40	0.1	2	5	1:2	3	EAR99
BAL-0050	0.0003-50	0.7	4	25	1:2	7	EAR99
EBAL-0050	0.01-50	0.2	3	5	1:2	4	EAR99
BAL-0067	0.0003-67	0.7	4	25	1:2	8.5	EAR99
EBAL-0067	0.01-67	0.2	2	5	1:2	4	EAR99

PULSE INVERTERS, Broadband, Fast Rise Time

Part Number	Band (GHz)	Loss (dB)	Rise/Fall Time (ps)	ECCN
INV-0026	0.0001-26.5	2	13	EAR99
INV-0040	0.0001-40	2.5	13	EAR99
INV-0065	0.0001-65	5	12	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

COUPLERS, High Directivity Bridge

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	VSWR	ECCN
CBR16-0003	0.0002-3	16	40	1.1	EAR99
CBR16-0006	0.0002-6	16	38	1.15	EAR99
CBR16-0012	0.0002-12	16	32	1.25	EAR99
CBR17-0026	0.0002-26	17	23	1.22	EAR99

COUPLERS, Low Loss High Power

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Loss (dB)	Average Power Handling (W)	ECCN
C17-0R506	0.5-6	17	20	0.4	120	EAR99
C17-0R512	0.5-12	17	20	0.65	80	EAR99
C17-0R518	0.5-18	17	20	1	60	EAR99
CA-18	DC-18	> 30	22	0.35	200	EAR99
CA-26	DC-26.5	> 27	24	0.35	50	EAR99
CA-40	DC-40	> 27	24	0.5	20	EAR99
CA-50	DC-50	> 27	24	0.5	15	EAR99
C-0250	2-50	12	15	0.7	10	EAR99
C-0265	2-65	12	15	0.7	10	EAR99

COUPLERS, Stripline Directional

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Flatness (dB)	VSWR	ECCN
C09-0R412	0.45-12	9	22	±0.7	1.15	EAR99
C09-0R418	0.45-18	9	22	±0.7	1.15	EAR99
C09-0R426	0.45-26.5	9	22	±0.7	1.15	EAR99
C09-0R430	0.45-30	9	20	±0.7	1.15	EAR99
C20-0R612	0.6-12	20	22	±0.6	1.2	EAR99
C10-0116	1-16	10	20	±0.5	1.15	EAR99
C20-0116	1-16	20	20	±0.6	1.15	EAR99
C20-0R518	0.5-18	20	22	±0.75	1.2	EAR99
C20-0R520	0.5-20	20	22	±0.75	1.2	EAR99
C13-0126	1-26.5	13	20	±0.6	1.15	EAR99
C16-1R718	1.7-18	16	20	±0.3	1.15	EAR99
C16-1R726	1.7-26.5	16	20	±0.4	1.15	EAR99
C10-0226	2-26.5	10	22	±0.6	1.15	EAR99
C20-0226	2-26.5	20	22	±0.75	1.25	EAR99
C13-0140	1-40	13	16	±0.1	1.2	EAR99
C20-0240	2-40	20	17	±0.75	1.3	EAR99
C13-0150	1-50	13	16	±0.75	1.2	EAR99
C10-0450	4-50	10	15	±0.5	1.35	EAR99
C10-0667	6-67	10	17	±0.8	1.2	EAR99
C16-0667	6-67	16	17	±0.9	1.25	EAR99
C20-0667	6-67	20	17	±0.8	1.25	EAR99
MC10-25110M2	25-110	10	19.5	+0.2	1.43	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

COUPLERS, Elite Stripline Directional

Part Number	Band (GHz)	Coupling (dB)	IL Corrected Directivity (dB)	Flatness (dB)	VSWR	ECCN
CE10-0R620T	0.6-20	10	27	±0.2	1.07	EAR99
CE10-0R640(T)	0.6-40	10	24/22	±0.2	1.07/1.08	EAR99
CE10-1R520(T)	1.5-20	10	32	±0.25	1.07	EAR99
CE10-1R540(T)	1.5-40	10	26/22	±0.25	1.07	EAR99
CE13-0220T	2-20	13	30	±0.15	1.07	EAR99
CE13-0240(T)	2-40	13	29/27	±0.15	1.07/1.08	EAR99
CE16-0220T	2-20	16	32	±0.1	1.07	EAR99
CE16-0240(T)	2-40	16	30/29	±0.1	1.07	EAR99
CE20-0R620T	0.6-20	20	26	±0.15	1.07	EAR99
CE20-1R640(T)	0.6-40	20	27/24	±0.15	1.07	EAR99
CE20-0220T	2-20	20	30	±0.1	1.07	EAR99
CE20-0R240(T)	2-40	20	33/28	±0.1	1.05/1.07	EAR99

COUPLERS, Dual Directional

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Flatness (dB)	VSWR	ECCN
CD10-0106	0.7-6.3	10	25	±0.6	1.14	EAR99
CD10-0114	0.7-14.7	10	23	±0.6	1.17	EAR99

COUPLERS, Pick-Off Tees

Part Number	Band (GHz)	Pick-Off Loss (dB)	Insertion Loss (dB)	ECCN
PT-0020	DC-20	16	2	EAR99
PT-0030(A)	DC-30	16	2	EAR99

COUPLERS, Hybrid

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Excess Loss (dB)	Isolation (dB)	ECCN
QH-0R518	0.5-18	±0.5	±3	1.5	20	EAR99
QH-0R71R3	0.65-1.3	±0.3	±3	0.5	16	EAR99
QH-0R714	0.7-14.5	±0.2	±2	1.2	22	EAR99
MQS-0209UB	2-9	±0.5	±3	2	16	EAR99
MQS-0218UA	2-18	±1	±3	1.4	17	EAR99
QH-0226	2-26.5	±0.25	±2	2	22	EAR99
MQH-2R58R5UB	2.5-8.5	±0.4	±3	2	23	EAR99
MQH-3R510UB	3.5-10	±0.4	±1.5	1.8	25	EAR99
MQS-0418UA	4-18	±0.4	±0.5	1.5	20	EAR99
QH-0440	4-40	±0.4	±5	2	18	EAR99
MQH-0517UB	5-17	±0.5	±6	1.6	23	EAR99
QH-0550	5-50	±0.6	±5	1	22	EAR99
QH-0867	8-67	±0.6	±6	1.2	18	EAR99
MQH-40110M2	40-110	1	5	2.5	18	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

DIPLEXERS

Part Number	Passband Low (GHz)	Passband High (GHz)	Isolation (dB)	ECCN
MDPX-0305	DC-3	5-26.5	47	EAR99
MDPX-0407	DC-4	7-26.5	38	EAR99
MDPX-0609	DC-6	9-26.5	58	EAR99

EQUALIZERS, Positive-Slope

Part Number	Band (GHz)	Loss at DC (dB)	Typ Return Loss (dB)	ECCN
EQX-26	DC-26	3, 6	21, 15	EAR99
MEQX-26AS	DC-26.5	3, 6, 10	18, 20, 20	EAR99
EQX-40	DC-40	3, 6	18	EAR99
MEQX-40ABH	DC-40	6*, 10*	24, 25	EAR99
MEQ10-50AU	DC-50	10	15	EAR99
MEQX-60ABH	DC-60	4*, 6*, 10*	25, 24, 22	EAR99

FIXED FILTERS: Lowpass, Highpass, Bandpass

The filters below are a small sample of Marki Microwave's extensive portfolio. Visit markimicrowave.com for the full catalog of filters.

LOWPASS

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	ECCN
◆ MFLP-00002BH*	9.34	11.21	11.85	EAR99
◆ MFLP-00005BH*	18.12	20.91	29	EAR99

HIGHPASS

Part Number	Cutoff (GHz)	30dB Rejection Freq (GHz)	50dB Rejection Freq (GHz)	ECCN
◆ MFHP-00001BH*	1.91	1.36	1.16	EAR99
◆ MFHP-00002BH*	9.78	8.24	7.57	EAR99

BANDPASS

Part Number	Center Freq (GHz)	Low Freq 1dB Cutoff (GHz)	High Freq 1dB Cutoff (GHz)	Insertion Loss @ Center Freq (GHz)	ECCN
MFBA-00004BH	10.19	8.01	12.41	2.29	EAR99
◆ MFBP-00084BH*	7.5	6.07	9.27	2.4	EAR99
◆ MFBP-00086BH*	14.99	12.57	17.88	2	EAR99
◆ MFBP-00053BH*	18.84	15.73	22.58	1.7	EAR99
◆ MFBP-00089BH*	22.18	17.93	27.44	1.9	EAR99
MFB-3475U	34.75	28.90	39.40	2.80	EAR99
MFBC-00017M	42.00	34.50	49.50	2.00	EAR99
MFBC-00008M	44.50	36.70	51.10	2.15	EAR99
MFBC-00018M	53.75	44.50	62.50	2.15	EAR99
MFBC-00009M	55.60	46.50	63.50	2.25	EAR99
MFBC-00019M	70.00	58.30	77.70	2.85	EAR99
MFBC-00020M	93.50	77.35	107.80	3.60	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

LIMITERS

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Peak Power CW (W)	Peak Power Pulsed (W)	P1dB (dBm)	ECCN
◆ HLM-100001BH*¹	DC-10	1	+10 @ 5 GHz	4	-	+10	EAR99
◆ HLM-20BH*¹	DC-20	1	+15 @ 10 GHz	4	-	+15	EAR99
HLM-8011U¹	DC-30	0.8	+7@30GHz	1	4.5	+10	EAR99
◆ HLM-40BH*¹	DC-40	1	+14 @ 20 GHz	2	-	+15	EAR99
HLM-40U¹	DC-40	1	+16@20GHz	4	20	15	EAR99
HLM-40ABH¹	DC-40	0.7	+9@30GHz	2	-	+10	EAR99

¹Power ratings are dependent on frequency, temperature, and pulse conditions

IQ MIXERS

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	ECCN
MMIQ-0205HXA	1.75-5	DC-2	8	33	61	EAR99
MMIQ-0218(L/H)XPC	2-18	DC-3	8/7.5	27/35	58/53	EAR99
MMIQ-0416(L/H)S	4-16	DC-6	8/9	28/29	58/59	EAR99
MMIQ-0520(L/H)S	5-20	DC-6	9	35	46	EAR99
MMIQ-0626(L/H)S	6-26	DC-6	9	35	41	EAR99
MMIQ-1037H	10-37	DC-12	9	25	47	EAR99
MMIQ-1040(L/S)S	10-40	DC-12	9	25	47/44	EAR99
MMIQ-1865(L/H/S)UB	18-65	DC-23	8/8/9	35	49/48/50	EAR99
MMIQ-4067LU	40-67	DC-20	9	35	33	EAR99
MMIQ-40100(L/H)M	40-100	DC-20	10	30	see datasheet	EAR99
MMIQ-30120HM¹	30-120	DC-30	8.5	27	40	EAR99

¹Differential IF IQ Mixer

MIXERS, Double Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
MM1-0115HS	1-15	DC-2.5	7.5	+24	+17	EAR99
MM1-0212(L/H/S)S	2-12	DC-3	8/8.5/8.5	+14/+23/+26	+9/+15/+20	EAR99
MM1-0222(L/H)S	2-22	DC-3.5	7	+13/+23	+9/+15	EAR99
MM1-0312(H/S)S	3-12	DC-4.5	7.5	+23/+26	+15/+20	EAR99
MM1-0320(L/H)S	3-20	DC-4	8	+10/+20	+7/+15	EAR99
MM1-0330(H/I)S	3-30	DC-5	7/9	+21/+32	+19/+23	EAR99
MM1-0424SS	4.5-24	DC-4	8	+25	+20	EAR99
MM1-0626(H/S)S	6-26.5	DC-9	7.5/8	+21/+25	+15/+20	EAR99
MM1-0832(L/H)S	8-32	DC-12	8/7.6	+14/+23	+9/+15	EAR99
MM1-1044(L/H)S	10-44	DC-14	7.6	+13/+22	+9/+15	EAR99
MM1-1140HS	11-40	DC-12	8	+21	+15	EAR99
MM1-1240SS	12-40	DC-12	8	+25	+20	EAR99
MM1-1467(L/H)S	14-67	DC-21	7	+12/+17.5	+11/+15	EAR99
MM1-1850(H/S)S	18-50	DC-20	8/8.5	+21/+25	+15/+20	EAR99
MM1-1857(L/H)S	18-57	DC-21	8/7.5	+13/+20	+9/+13	EAR99
MM1-2567LS	25-67	DC-30	9	+9	+13	EAR99
MM1-30100LM	30-100	DC-20	8.5	see datasheet	+14	EAR99
MMH-35120HM¹	35-120, 12-40	DC-14	18	+7	+15	3A001.b.7.c.1

¹Harmonic Mixer

MIXERS, Triple Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
MT3A-0113HPA¹	1-13	0.5-8.5	9.5	+28	+12	EAR99
MT3L-0113HS	1.5-13	0.25-5	8.5	+31	+20	EAR99
MT3H-0113(L/H)S	1.5-13	0.8-8.5	8/8.5	+20/+28	+15/+20	EAR99
T3-18GLS	0.01-18	0.001-10	7.5	+25	+20	EAR99
T3H-18GLS	0.01-18	0.01-18	9.5	+30	+20	EAR99
T3-20GLS	0.01-20	0.001-10	7.5	+30	+20	EAR99
T3H-20G(L/I)S	0.01-20	0.01-20	9.5	+30	+20	EAR99
T3-0838GLN	8-38	0.01-10	8	+30	+20	EAR99
T3-1040GLN	10-40	1-18	8	+25	+20	EAR99
MM2-0530(L/H)S	5-30	2-20	10/9	+15/+21	+15/+20	EAR99

¹Integrated low phase noise driver amplifier

PASSIVE MULTIPLIERS and NON LINEAR TRANSMISSION LINES

Part Number	Type	Input (GHz)	Output (GHz)	1F Suppression (dBc)	3F Suppression (dBc)	ECCN
MMD-0415HS	Doubler	2-7.5	4-15	27	36	EAR99
MMD-1030(L/H)S	Doubler	5-15	10-30	38/41	46/51	EAR99
◆ MMD-1030LBH*	Doubler	5-15	10-30	38	46	EAR99
◆ MMD-1640LBH*	Doubler	8-20	16-40	42	52	EAR99
MMD-1648LS	Doubler	8-24	16-48	44	69	EAR99
MMD-1250HU	Doubler	6-25	12-50	32	40	EAR99
MMD-2060(L/H)U	Doubler	10-30	20-60	37/38	41/40	EAR99
MMD-3567LU	Doubler	17.5-33.5	35-67	38	44	EAR99
MMD-3580LU-KW	Doubler	17.5-40	35-80	38	44	EAR99
MMD-20100HM	Doubler	10-50	20-100	24.5	33	3A001.b.7.b.1
MMD-40120HM	Doubler	20-60	40-120	30	40	3A001.b.7.b.1
MMQ-40125HM	Quadrupler	10-31.25	40-125	19	12	3A001.b.7.b.1
NLTL-6273S	Comb Generator	0.7-5	0.7-40	–	–	EAR99
NLTL-6275U/USW	Comb Generator	3-15	3-85	–	–	EAR99

ACTIVE MULTIPLIERS

Part Number	Input (GHz)	Output (GHz)	Input (dBm)	Output (dBm)	ECCN
ADA-0416	2-8	4-16	0 to +6	+16	EAR99
ADA-1030	5-15	10-30	0 to +6	+16	EAR99
ADA-2052	10-26	20-52	-6 to +2	+16	EAR99
AQA-2156	5.25-14	21-56	-2 to +6	+20	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

POWER DIVIDERS, High Isolation

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Isolation (dB)	ECCN
PBR-0003	.0003-3	1.25	±0.4	45	EAR99
PBR-0006	.0003-6	1.5	±0.5	40	EAR99
PBR-0012	.0003-12	1.5	±0.6	35	EAR99

POWER DIVIDERS, Wilkinson 1:2

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD-0R413	0.4-13.2	1	±0.05	±1	24	EAR99
PD-0R426	0.4-26	2	±0.05	±2	24	EAR99
PD-0R510	0.5-10	0.9	±0.1	±1	22	EAR99
PD-0R618	0.6-18	1	±0.05	±1	22	EAR99
PD-0R636	0.6-36	2	±0.1	±3	22	EAR99
PD-0109	1-9	0.75	±0.1	±1	22	EAR99
PD-0126	1-26	1	±0.1	±3	20	EAR99
PD-0140	1-40	1.5	±0.2	±2	20	EAR99
PD-0150	1-50	2	±0.25	±3	20	EAR99
PD-0165	1-65	5	±0.25	±3	20	EAR99
PD-0218	2-18	1	±0.2	±2	22	EAR99
PD-0220	2-20	1	±0.2	±2	22	EAR99
PD-0426	4-26.5	0.8	±0.2	±2	18	EAR99
PD-0440	4-40	1	±0.2	±3	18	EAR99
PD-0450	4-50	1.2	±0.5	±5	18	EAR99
PD-0465	4-65	2	±0.5	±5	18	EAR99
MPDW-10110M2	10-110	3	±0.25	±3	22	EAR99

POWER DIVIDERS, Wilkinson 1:3

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD3-0R412	0.4-12	1.5	±0.1	±2	23	EAR99
PD3-0R616	0.6-16	1.5	±0.1	±2	24	EAR99
PD3-0126	1.5-26.5	1.5	±0.3	±4	24	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

POWER DIVIDERS, Wilkinson 1:4

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD4-0R518	0.5-18	1.5	±0.25	±3	20	EAR99
PD4-0R526	0.5-26.5	2.5	±0.25	±3	19	EAR99
PD4-0R532	0.5-32	2.5	±0.3	±4	19	EAR99
PD4-0120	1-20	1.5	±0.25	±3	20	EAR99
PD4-0126	1-26.5	1.5	±0.3	±3	20	EAR99
PD4-0140	1-40	2.5	±0.4	±4	19	EAR99
PD4-0150	1-50	4	±0.5	±5	20	EAR99
PD4-0218	2-18	1.2	±0.2	±2	20	EAR99

POWER DIVIDERS, Resistive 1:2

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	ECCN
PD-0010	DC-10	0.25	±0.1	±1	EAR99
PD-0020	DC-20	0.5	±0.2	±2	EAR99
PD-0030	DC-30	0.5	±0.25	±2	EAR99
PD-0040	DC-40	0.75	±0.25	±2	EAR99
MPDR-00110M2	DC-110	1.5	±0.25	±7.5	EAR99

TERMINATIONS

Part Number	Band (GHz)	Impedance (Ω)	Return Loss (dB)	ECCN
◆ T(M*/E*)50-27	DC-27	50	32	EAR99
◆ T(M*/E*)50-40	DC-40	50	35	EAR99
◆ T(M*/E*)50-50	DC-50	50	31	EAR99
◆ T(M*/E*)50-67	DC-67	50	36	EAR99
T(M/E)50-110M	DC-110	50	15	EAR99

THUMBWHEEL

Part Number	Description	ECCN
TW-1	quick, secure, wrenchless connection for SMA, 2.92mm and 2.4mm	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

SURFACE MOUNT

AMPLIFIERS, Driver

Part Number	Band (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm)	Bias Voltage (V)	Bias Current (mA)	Package	ECCN
ADM-0012-5931SM	0 - 12	11.5	19	26	+3 to +7 VD and -0.3 to 0 VG	85	3mm QFN	EAR99
APM-7099SM ¹	0.01 - 20	14	25	27	+5 to +9 VC and +5 to +9 VB	72	4mm QFN	EAR99
APM-7098SM ¹	0.1 - 22	15	23	19	+5 to +9 VC and +5 to +9 VB	44	4mm QFN	EAR99
APM-7516PSM ¹	1.5 - 20	11	22	33	+4 to +6 VC and +5 VB	105	4mm QFN	EAR99
AMM-9619PSM	2 - 26	16.1	-	28	+5 VD and -0.3 to -0.5 VG	74	4mm QFN	EAR99
ADM-0026-5929SM	0 - 26.5	13	20	26	+3 to +7 VD and -0.3 to 0 VG	165	4mm QFN	EAR99
AMM-7473PSM	0.4 - 27	17	25	34	+5 to +7 VD and -0.7 to -0.6 VG	150	4mm QFN	EAR99
ADM-8006PSM	2 - 30	23	23	30	+3 to +6 VG and 3 to +6 VD	218	4mm QFN	EAR99
APM-6849SM ¹	2 - 30	11	21	20	+3 to 6 VC and +3 to +6 VB	21	3mm QFN	EAR99
AMM-7199SM	11 - 38	21	21	29	+2.5 to +4 VD and -0.6 to -0.4 VG	180	3mm QFN	3A001.b.2.d
AMM-7199ASM	11-38	20	19	29	+2.5 to +3 VD and -0.6 to -0.4 VG	130	3mm QFN	3A001.b.2.d
AMM-9856PSM	0 - 40	10	-	25	+5 VD and -0.4 to -0.2 VG	61	3mm QFN	3A001.b.2.d
ADM-8007PSM	2 - 40	23	23	30	+3 to +6 VD and +3 to +6 VG	218	4mm QFN	3A001.b.2.d
AMM-7200SM	12 - 46	18	22	29	+2.5 to +4 VD and -0.6 to -0.4 VG	180	3mm QFN	3A001.b.2.d
◆ AMM-7200ASM*	12 - 46	20	20	29	+2.5 to +3 VD and -0.6 to -0.4 VG	180	3mm QFN	3A001.b.2.d
◆ AMM-10202PSM*	15-50	20.5	18	23	+2 to +4 VD and -0.35 to -0.15 VG	200	4mm QFN	3A001.b.2.d
AMM-6702SM	20 - 50	24	19	27	+2 to +3 VD and -0.6 to -0.4 VG	180	4mm KFN	3A001.b.2.d
AMM-8211PSM	22 - 57	14	20	26	+2.5 to +3 VD and -0.6 to -0.4 VG	175	3mm QFN	3A001.b.2.d

¹Low Phase Noise

*New Release since 3/2025

All electrical specifications given are typical values.

AMPLIFIERS, [Gain Block](#) and [Low Noise](#)

Part Number	Band (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	Package	ECCN
ADM-8350PSM	0.09 - 6	23	1.8	22	40	+3 to +6VD	84	1.3x2mm DFN	EAR99
ADM-8096PSM	0.09 - 6	22	1.5	21	33	+3 to +6VD	58	1.3x2mm DFN	EAR99
ADM-8625PSM	0.75 - 8	18	1.5	17	27	+3 to +6VD	49	3mm QFN	EAR99
ADM-8622PSM	0 - 10	15.5	2	13.5	26	+3.3 VD	40	1.3x2mm DFN	EAR99
ADM-8095PSM	0.09 - 10	18	1.2	18	30	+3 to +6VD	39	1.3x2mm DFN	EAR99
AKA-1300PSM	0 - 14	13	5	14	28	+3.7 to +3.9 VD	50	1.3x2mm DFN	EAR99
AKA-1310PSM	0 - 14	13	5	14	28	+4.5 to +4.7 VD	50	1.3x2mm DFN	EAR99
AKA-1400PSM	0 - 14	17	4	15	28	+3.7 to +3.9 VD	50	1.3x2mm DFN	EAR99
AKA-1500PSM	0 - 14	19	4	16	28	+4.1 to +4.3 VD	50	1.3x2mm DFN	EAR99
ADM-8475PSM	0.5 - 18	13	2	16	26	+3 to +6VD	40	1.3x2mm DFN	EAR99
◆ AMM-9852PSM*	0 - 20	17.5	1.8	20	33	+5 VD and -0.2 to -0.4 VG	89	3mm QFN	EAR99
◆ AMM-9853PSM*	0 - 20	16.5	1.8	17	28	+4 VD and -0.35 to -0.45 VG	45	3mm QFN	EAR99
◆ AMM-9859PSM*	0 - 20	15.5	1.9	14.5	28	+4 VD and -0.4 to -0.5 VG	32	3mm QFN	EAR99
ADM-9028PSM	0 - 20	17	2.5	14.5	24	+5 to +8 VD and +2 to +3 VB	50	4mm QFN	EAR99
ADM-8624PSM	0.2 - 20	11.5	2.8	13.5	25	+4 to +6 VD and +4 to +6 VG	40	1.3x2mm DFN	EAR99
ADM-8536PSM	2 - 20	10	2.5	13	25	+3 to +6 VD and +3 to +6 VB	41	1.3x2mm DFN	EAR99
◆ AMM-9858PSM*	2 - 20	17.5	1.9	18	30	+4 to +5 VD and -0.2 to -0.5 VG	76	3mm QFN	EAR99
ADM-9027PSM	2 - 24	17	1.8	17	26	+5 to +7 VD and +2 to +3 VB	60	4mm QFN	EAR99
ADM-9181PSM	0 - 26	14.5	3.2	22	31	+4 to +6 VD and +2 to +4.4 VB	130	4mm QFN	EAR99
◆ AMM-9854PSM*	0 - 30	14	2.5	17	25	+5 VD and -0.2 to -0.4 VG	67	3mm QFN	EAR99
◆ AMM-9855PSM*	0 - 30	13	2.2	14	26	+4 VD and -0.35 to -0.45 VG	40	3mm QFN	EAR99
◆ AMM-9860PSM*	3 - 30	13.5	2.7	15.5	28	+5 VD and -0.2 to -0.4 VG	38	3mm QFN	EAR99
◆ AMM-9861PSM*	3 - 30	11.7	2.5	12.4	24	+4 VD and -0.35 to -0.45 VG	21	3mm QFN	EAR99
◆ AMM-9862PSM*	4 - 40	10	3.4	13.3	23	+5 VD and -0.2 to -0.4 VG	25	3mm QFN	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

ATTENUATORS

Part Number	Band (GHz)	Attenuation (dB)	Return Loss (dB)	Package	ECCN
ATN00-0040PSM	DC-40	0	27	1.3x2mm DFN	EAR99
ATN01-0040PSM	DC-40	1	27	1.3x2mm DFN	EAR99
ATN02-0040PSM	DC-40	2	26	1.3x2mm DFN	EAR99
ATN03-0040PSM	DC-40	3	25	1.3x2mm DFN	EAR99
ATN04-0040PSM	DC-40	4	21	1.3x2mm DFN	EAR99
ATN05-0040PSM	DC-40	5	20	1.3x2mm DFN	EAR99
ATN06-0040PSM	DC-40	6	22	1.3x2mm DFN	EAR99
ATN07-0040PSM	DC-40	7	21	1.3x2mm DFN	EAR99
ATN08-0040PSM	DC-40	8	21	1.3x2mm DFN	EAR99
ATN09-0040PSM	DC-40	9	20	1.3x2mm DFN	EAR99
ATN10-0040PSM	DC-40	10	25	1.3x2mm DFN	EAR99
ATN15-0040PSM	DC-40	15	22	1.3x2mm DFN	EAR99
ATN20-0040PSM	DC-40	20	22	1.3x2mm DFN	EAR99
ATN00-0070CSP1	DC-70	0.3	20	1.5mm CSP1	EAR99
◆ ATN01-0070CSP1*	DC-70	1.3	23	1.5mm CSP1	EAR99
◆ ATN02-0070CSP1*	DC-70	2.1	25	1.5mm CSP1	EAR99
ATN03-0070CSP1	DC-70	3.2	22	1.5mm CSP1	EAR99
◆ ATN04-0070CSP1*	DC-70	4.1	22	1.5mm CSP1	EAR99
◆ ATN05-0070CSP1*	DC-70	5.2	24	1.5mm CSP1	EAR99
ATN06-0070CSP1	DC-70	6	22	1.5mm CSP1	EAR99
◆ ATN07-0070CSP1*	DC-70	7.1	21	1.5mm CSP1	EAR99
◆ ATN08-0070CSP1*	DC-70	8.2	22	1.5mm CSP1	EAR99
◆ ATN09-0070CSP1*	DC-70	9.1	20	1.5mm CSP1	EAR99
ATN10-0070CSP1	DC-70	10.2	23	1.5mm CSP1	EAR99
◆ ATN15-0070CSP1*	DC-70	15.3	17	1.5mm CSP1	EAR99
◆ ATN20-0070CSP1*	DC-70	20.4	17	1.5mm CSP1	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

BALUNS, Active

Part Number	Band (GHz)	Directionality	Mode Converter Gain (dB)	HD2 (dBc)	HD3 (dBc)	Voltage (V)	Current (mA)	Package	ECCN
◆ ABDS-10170PSM*	0 - 30	Differential to Single Ended	+2.5	48	44	+4V and -4V	+67 and -67	3mm QFN	EAR99
◆ ABSD-10168PSM*	0 - 30	Single Ended to Differential	+3.5	39	45	+4V and -4V	+72 and -72	3mm QFN	EAR99
◆ ABSD-10169PSM*	0 - 30	Single Ended to Differential	+9	52	37	+5V and -5V	+137 and -116	3mm QFN	EAR99

BALUNS, Passive

Part Number	Band (GHz)	Impedance Ratio	CMRR (dB)	Amp Bal (dB)	Phase Bal (°)	Insertion Loss as a Mode Converter (dB)	Isolation (dB)	Package	ECCN
BAL-0003SMG	0.0005-3	1:2	45	0.1	3	3.8	9	SMG	EAR99
BALH-0003SMG	0.0005-3	1:1	35	0.2	2	1.9	7	SMG	EAR99
BAL-0006SMG	0.0005-6	1:2	45	0.1	0.4	3.8	8	SMG	EAR99
BALH-0006SMG	0.0005-6	1:1	32	0.2	2	1.9	6	SMG	EAR99
BAL-0009SMG	0.0005-9	1:2	45	0.1	0.9	3.8	8	SMG	EAR99
BALH-0009SMG	0.0005-9	1:1	32	0.2	2	1.9	7	SMG	EAR99
BAL-0012SSG	0.01-12	1:2	26	0.6	5	5	8	SSG	EAR99
BALH-0012SSG	0.01-12	1:1	25	0.6	5	2	6	SSG	EAR99
BAL-0020SLG	0.01-20	1:2	35	0.4	5	4.5	12	SLG	EAR99
BAL-0032SSG	0.01-32	1:2	25	0.5	5	5	8	SSG	EAR99
MBAL-0104SM	1-4	1:2	33	0	2	2.5	8	4mm QFN	EAR99
◆ MBAL-0R106CSP2*	0.1-6	1:2	33	0.1	0.5	3.3	6	2.5mm CSP2	EAR99
◆ MBALH-0R106CSP2*	0.1-6	1:1	35	0.2	0.4	3.5	9	2.5mm CSP2	EAR99
◆ MBAL-0R520CSP2*	0.5-20	1:2	31	0.2	2.3	3	7	2.5mm CSP2	EAR99
◆ MBALH-0R520CSP2*	0.5-20	1:1	32	0.3	2	3.6	9	2.5mm CSP2	EAR99
MBAL-0220CSP2	2-20	1:2	27	0.3	3	1.4	5	2.5mm CSP2	EAR99
MBAL-0220SM	2-20	1:2	30	0.25	3	6	10	4mm QFN	EAR99
MBAL-1445SM	14-45	1:2	33	0.2	2.5	4.5	18	4mm QFN	EAR99
◆ MBAL-0250CSP2*	2-50	1:2	35	0.3	2.1	5.3	7	2.5mm CSP2	EAR99
◆ MBAL-0260CSP2*	2-60	1:2	33	0.4	0.4	6.3	8	2.5mm CSP2	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

BIAS TEES

Part Number	Band (GHz)	Insertion Loss (dB)	DC Current (A)	DC Port Isolation (dB)	DC Voltage (V)	Package	ECCN
BT-0010SMG(-1/-2)	0.02-10	0.5	0.5	40	30	SMG	EAR99
BTL-0012SMG(-1/-2)	0.0005-12	0.5	0.5	35	30	SMG	EAR99
BTL-0026SMG(-1/-2)	0.0005-26	1	0.5	35	30	SMG	EAR99
♦ BTM-0026SMG(-1*/-2)	0.01-26	0.43	0.32	25	16	PSM	EAR99
BT-0026SMG(-1/-2)	0.02-26	1	0.5	40	35	SMG	EAR99
BTL-0035SMG(-1/-2)	0.0005-35	1	0.5	35	30	SMG	EAR99
BT-0035SMG(-1/-2)	0.02-35	1	0.5	35	30	SMG	EAR99
BTL-0035SMG(-1/-2)	0.0005-35	1	0.5	35	30	SMG	EAR99

COUPLER, Directional

Part Number	Band (GHz)	VSWR	Mean Coupling (dB)	Directivity (dB)	Package	ECCN
MC16-0222SM	2-22	1.22	16	23	4mm QFN	EAR99

COUPLERS, Hybrid

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Package	ECCN
MQS-0218SM	2-18	1	3	15	4mm QFN	EAR99
MQS-0518SM	5-18	0.5	2.5	17	4mm QFN	EAR99

DIPLEXERS and QUADPLEXERS

Part Number	Passband (GHz)	Isolation (dB)	Type	Package	ECCN
DPX-M50(-1/-2)	DC-0.035 / 0.07-10	24	Diplexer	SM	EAR99
DPX-0R5(-1/-2)	DC-0.36 / 0.7-8	24	Diplexer	SM	EAR99
DPX-1(-1/-2)	DC-0.85 / 1.4-5	24	Diplexer	SM	EAR99
DPX-2(-1/-2)	DC-1.5 / 2.7-7	25	Diplexer	SM	EAR99
DPX-3(-1/-2)	DC-2.3 / 4.2-8	25	Diplexer	SM	EAR99
DPX-4(-1/-2)	DC-2.8 / 5.5-12	30	Diplexer	SM	EAR99
MDPX-0305PSM-1	DC-3 / 5-26.5	53	Diplexer	3mm QFN	EAR99
MDPX-0407PSM-2	DC-4 / 7-26.5	38	Diplexer	3mm QFN	EAR99
MDPX-00003PSM	DC-4.13 / 6.3-25.61	see datasheet	Diplexer	4mm QFN	EAR99
MDPX-00004PSM	DC-5.61 / 8.29-27.87	see datasheet	Diplexer	4mm QFN	EAR99
♦ MDPX-00009CSP3*	DC-7 / 8-35	see datasheet	Reflectionless Diplexer	3.5mm CSP3	EAR99
MDPX-00005PSM	DC-7.49 / 10.5-28	see datasheet	Diplexer	4mm QFN	EAR99
MDPX-00006PSM	DC-9.3 / 12.63-28	see datasheet	Diplexer	4mm QFN	EAR99
MDPX-00007PSM	DC-10.63 / 14.71-28	see datasheet	Diplexer	4mm QFN	EAR99
MDPX-00008PSM	DC-13.1 / 16.51-28	see datasheet	Diplexer	4mm QFN	EAR99
♦ MDPX-00010CSP3*	DC-19.7 / 20.9-45	see datasheet	Diplexer	3.5mm CSP3	EAR99
MMPX-00001PSM	DC-4 / 6-8 / 10-12 / 14-20	see datasheet	Quadplexer	6mm QFN	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

EQUALIZERS, Positive Gain Slope

Part Number	Band (GHz)	Low Freq Attenuation (dB)	Typ Return Loss (dB)	Package	ECCN
MEQX-7ASM	DC-7	3 , 6 , 10 , 12.5	29, 29, 27, 27	3mm QFN	EAR99
MEQX-14ASM	DC-14	3 , 6 , 10 , 14	23, 28, 29, 29	3mm QFN	EAR99
MEQX-20ASM	DC-20	3 , 5 , 6 , 7.5 , 10 , 11	19, 22, 23, 26, 20, 27	3mm QFN	EAR99
MEQX-20CSP1	DC-20	3* , 6* , 10* , 20*	25, 25, 25, 25	1.5mm CSP1	EAR99
MEQX-26CSP1	DC-26	6 , 10	23, 17	1.5mm CSP1	EAR99
MEQX-45CSP1	DC-45	6 , 10	17, 13	1.5mm CSP1	EAR99

CONFIGURABLE FILTERS, Tunable

Part Number	Center Freq (GHz)	3dBc Passband (GHz)	Insertion Loss at Center Freq (dB)	Passband Return Loss (dB)	Stopband Rejection (dB)	OIP3 (dBm)	Package	ECCN
MFBT-00001PSM	3.5-9.5	3.0-10.0	6.5	15	35	33	4mm QFN	3A001.b.5.a
MFBT-00002PSM	5.5-15.5	4.5-16.5	6.5	15	35	33	4mm QFN	3A001.b.5.a
MFBT-00003PSM	10.0-26.0	8.0-30.0	7.5	10	35	35	4mm QFN	3A001.b.5.a

FIXED FILTERS, Lowpass

Part Number	1dB Cutoff (GHz)	3dB Cutoff (GHz)	30dB Cutoff (GHz)	Passband Return Loss (dB)	Package	ECCN
MFLP-00007PSM	1.47	2.04	2.44	27	4mm QFN	EAR99
MFLP-00008PSM	2.36	3.18	3.86	25	4mm QFN	EAR99
MFLP-00009PSM	3.12	4.21	5.16	27	4mm QFN	EAR99
MFLP-00010PSM	3.36	4.5	5.42	28	5mm QFN	EAR99
MFLP-00001PSM	5.2	6.21	7.02	21	4mm QFN	EAR99
MFLP-00011PSM	6.03	7.1	7.98	31	5mm QFN	EAR99
◆ MFLP-00012PSM*	7.47	9.22	10.27	29	5mm QFN	EAR99
MFLP-00002PSM	8.35	9.42	11.01	24	4mm QFN	EAR99
◆ MFLP-00013CSP1*	9.9	11.71	13.39	25	1mm CSP1	EAR99
MFLP-00003PSM	10.16	12.26	14.64	21	4mm QFN	EAR99
◆ MFLP-00014CSP1*	13.09	15.11	17.05	29	1mm CSP1	EAR99
MFLP-00004PSM	13.28	15.44	18.53	23	4mm QFN	EAR99
◆ MFLP-00015CSP1*	16	18.2	20.87	29	1mm CSP1	EAR99
MFLP-00005PSM	16.88	18.54	21.06	21	4mm QFN	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

FIXED FILTERS, Highpass

Part Number	1dB Cutoff (GHz)	3dB Cutoff (GHz)	30dB Cutoff (GHz)	Passband Return Loss (dB)	Package	ECCN
MFHP-00001PSM	2.98	1.96	1.4	19	4mm QFN	EAR99
MFHP-00004PSM	6.19	5.79	4.95	20	4mm QFN	EAR99
MFHP-00014PSM	6.22	5.46	4.39	13	5mm QFN	EAR99
MFHP-00005PSM	9.44	7.93	6.61	21	4mm QFN	EAR99
MFHP-00002PSM	10.97	9.68	8.23	16	4mm QFN	EAR99
MFHP-00006PSM	12.06	11.44	10.04	21	4mm QFN	EAR99
MFHP-00007CSP1	15.67	14.32	11.33	18	1mm CSP1	EAR99
MFHP-00003PSM	17.63	15.28	13.52	16	4mm QFN	EAR99
MFHP-00008CSP1	18.14	17.33	13.08	14	1mm CSP1	EAR99
MFHP-00009CSP1	19.75	18.96	14.51	18	1mm CSP1	EAR99
MFHP-00010CSP1	22.75	21.09	16.35	15	1mm CSP1	EAR99
MFHP-00011CSP1	24.38	23.42	18.19	15	1mm CSP1	EAR99
MFHP-00012CSP1	26.15	25.3	19.69	17	1mm CSP1	EAR99

FIXED FILTERS, Reflectionless

Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Passband Return Loss (dB)	Stopband Return Loss (dB)	Package	ECCN
MFQH-00001PSM	18.49-21.19	18.24-21.54	17.02-22.3	24	13	5mm QFN	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

FIXED FILTERS, Bandpass

	Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Insertion Loss (dB)	Package	ECCN
	MFBP-00094PSM	2-3.96	1.76-4.27	1.43-4.72	2.24	5mm QFN	EAR99
◆	MFBP-00108CSP3*	2.06-4.01	1.82-4.36	1.49-4.83	2	3.5mm CSP3	EAR99
	MFBP-00010PSM	2.23-5.86	1.87-6.24	1.39-7.03	1.5	5mm QFN	EAR99
	MFBP-00011PSM	2.35-7.97	1.88-8.45	1.38-9.8	1.24	5mm QFN	EAR99
	MFBP-00003PSM	2.53-16.38	1.91-18.62	1.38-21.23	0.75	5mm QFN	EAR99
	MFBP-00088PSM	2.7-4.11	2.49-4.39	2.17-4.83	2.74	5mm QFN	EAR99
◆	MFBP-00124PSM*	3.04-3.52	2.96-3.63	2.79-3.9	3.4	5mm QFN	EAR99
	MFBP-00092PSM	3.58-5.46	3.44-5.87	3.16-6.68	2.02	5mm QFN	EAR99
	MFBP-00145CSP3*	3.84-16.7	3.22-19.22	2.66-21.04	1	3.5mm CSP3	EAR99
	MFBP-00109CSP3*	3.98-6.12	3.73-6.48	3.14-7.16	2.4	3.5mm CSP3	EAR99
	MFBP-00095PSM	4.01-6.05	3.73-6.36	3.13-7.04	2.48	5mm QFN	EAR99
	MFBP-00001PSM	4.7-6.21	4.54-6.35	3.84-7.28	1.3	5mm QFN	EAR99
	MFBP-00104PSM	4.92-7.96	4.76-8.75	4.37-9.35	2.21	5mm QFN	EAR99
◆	MFBP-00125PSM*	5.16-5.67	5.08-5.79	4.77-6.08	3.8	5mm QFN	EAR99
	MFBP-00002PSM	5.85-7.45	5.69-7.6	4.93-8.58	1.5	5mm QFN	EAR99
	MFBP-00096PSM	5.86-8.35	5.58-8.67	4.77-9.53	2.59	5mm QFN	EAR99
◆	MFBP-00146CSP3*	5.86-9.9	5.7-10.93	5.16-11.84	2	3.5mm CSP3	EAR99
◆	MFBP-00110CSP3*	5.99-8.41	5.67-8.78	4.9-9.67	2.5	3.5mm CSP3	EAR99
	MFBP-00093PSM	6-6.99	5.87-7.16	5.48-7.67	2.81	5mm QFN	EAR99
	MFBP-00004PSM	6.08-10.26	5.69-10.69	4.81-12.12	1.85	5mm QFN	EAR99
	MFBP-00005PSM	6.26-18.07	5.72-19.04	4.8-21.32	1.1	5mm QFN	EAR99
◆	MFBP-00144CSP3*	6.85-14.72	6.22-15.93	5.28-17.57	1.6	3.5mm CSP3	EAR99
	MFBP-00059PSM	7-11.03	6.81-11.49	5.87-12.82	1.25	5mm QFN	EAR99
	FB-0785SM	7.27-7.47	7.12-8.59	6.43-9.43	2.2	SM	EAR99
	MFBP-00001PSM	7.39-9.77	7.27-10.19	6.42-10.76	2	5mm QFN	EAR99
	MFBP-00090PSM	7.45-9.62	7.25-9.86	6.76-10.48	1.85	5mm QFN	EAR99
◆	MFBP-00137PSM*	7.67-12.82	7.42-13.82	6.97-14.62	1.8	5mm QFN	EAR99
	FB-0850SM	7.9-9.16	7.66-9.37	6.37-10.51	2	SM	EAR99
	MFBP-00079CSP3	7.94-9.88	7.77-10.24	7.29-10.75	3.13	3.5mm CSP3	EAR99
◆	MFBP-00097PSM*	8-9.34	7.82-9.55	7.38-9.88	2.7	5mm QFN	EAR99
	MFBP-00006PSM	8.19-13.49	7.71-14.06	6.31-16.15	1.83	5mm QFN	EAR99
	FB-0900SM	8.38-9.58	8.2-9.82	6.82-10.93	2.2	SM	EAR99
	MFBA-00004PSM	8.44-12.3	7.94-12.52	7.18-13.74	1.9	5mm QFN	EAR99
	MFBP-00105PSM	8.48-11.73	8.23-12.04	7.67-12.96	1.54	5mm QFN	EAR99
◆	MFBP-00098PSM*	8.54-9.91	8.36-10.12	7.89-10.47	2.8	5mm QFN	EAR99
	MFBP-00091PSM	8.58-11.03	8.39-11.35	7.79-11.93	2.04	5mm QFN	EAR99
	FB-0955SM	8.86-10.18	8.65-10.45	7.18-11.47	2	SM	EAR99
◆	MFBP-00085CSP3*	8.95-14.42	8.6-15.22	8.14-16.3	1.8	3.5mm CSP3	EAR99
◆	MFBP-00099PSM*	9.01-10.38	8.86-10.64	8.33-10.99	2.8	5mm QFN	EAR99
	MFBC-00002PSM	9.15-12.28	8.99-12.82	7.79-13.56	1.8	5mm QFN	EAR99
	FB-1050SM	9.64-11.41	9.43-11.56	7.78-12.81	2	SM	EAR99
	MFBP-00080CSP3	10.11-11.93	9.92-12.26	9.37-12.75	3.42	3.5mm CSP3	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

FIXED FILTERS, Bandpass (cont.)

	Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Insertion Loss (dB)	Package	ECCN
	MFBA-00003PSM	10.28-14.14	9.8-14.38	8.92-15.46	2.1	5mm QFN	EAR99
	MFBP-00007PSM	10.31-18.18	9.49-18.82	8.23-21.33	1.8	5mm QFN	EAR99
	MFBP-00008PSM	10.38-13.84	9.95-14.22	9.41-15.23	1.73	5mm QFN	EAR99
	FB-1140SM	10.39-12.36	10.15-12.57	8.44-14.07	2	SM	EAR99
◆	MFBP-00143CSP3*	10.68-11.33	10.56-11.49	10.17-11.82	6	3.5mm CSP3	EAR99
◆	MFBP-00138PSM*	11.02-17.53	10.22-18.53	9.62-19.58	1.5	5mm QFN	EAR99
	FB-1215SM	11.37-12.94	11.03-13.17	9.42-14.71	2	SM	EAR99
	MFBC-00003PSM	11.86-15.81	11.67-16.3	10.28-17.16	1.7	5mm QFN	EAR99
	FB-1300SMG	11.97-14.03	11.63-14.33	9.76-15.9	2	SM	EAR99
	MFBP-00081CSP3	11.99-13.94	11.71-14.29	11.23-14.83	3.55	3.5mm CSP3	EAR99
	MFBP-00106PSM	12.01-15.28	11.69-15.6	10.98-16.39	1.67	5mm QFN	EAR99
	MFBP-00029PSM	12.23-13.96	11.9-14.17	11.38-14.66	2.65	5mm QFN	EAR99
◆	MFBP-00086CSP3*	12.69-17.9	12.22-18.44	11.64-19.63	1.9	3.5mm CSP3	EAR99
	MFBP-00074PSM	13.01-16.89	12.53-17.37	11.89-17.97	1.93	5mm QFN	EAR99
	FB-1445SM	13.22-15.71	12.83-15.97	10.59-17.42	2	SM	EAR99
	MFB-1445SM	13.51-15.13	13.28-15.41	12.51-17.36	3.8	3mm QFN	EAR99
◆	MFBP-00120PSM*	13.54-16.37	13.27-16.65	12.51-17.43	2.1	5mm QFN	EAR99
	MFBP-00060PSM	13.76-22.54	13.47-23.47	11.58-25.48	0.95	5mm QFN	EAR99
◆	MFBP-00082CSP3*	13.99-15.92	13.75-16.27	13.23-16.77	2.7	3.5mm CSP3	EAR99
	MFBP-00009PSM	14.12-17.85	13.62-18.35	12.8-19.54	1.86	5mm QFN	EAR99
	MFBA-00001PSM	14.16-17.88	13.8-18.18	12.76-19	2.4	5mm QFN	EAR99
	FB-1575SMG	14.53-16.89	14.09-17.07	11.86-18.55	2	SM	EAR99
	MFBC-00010PSM	14.62-18.85	13.94-19.49	12.98-20.98	1.7	5mm QFN	EAR99
	MFBC-00004PSM	14.92-19.81	14.68-20.5	13.01-21.62	1.6	5mm QFN	EAR99
◆	MFBC-00004CSP3*	14.99-19.75	14.69-20.22	13.51-21.55	1.8	3.5mm CSP3	EAR99
◆	MFBP-00121PSM*	15.48-18.38	15.25-18.72	14.13-19.51	1.9	5mm QFN	EAR99
	MFBP-00107PSM	15.5-17.91	15.24-18.31	14.65-18.88	2.32	5mm QFN	EAR99
◆	MFBP-00064CSP3*	15.83-19.74	15.6-20.23	14.37-21.23	2	3.5mm CSP3	EAR99
◆	MFBP-00083CSP3*	16.04-17.92	15.81-18.24	15.29-18.74	2.8	3.5mm CSP3	EAR99
	MFBC-00011PSM	16.18-20.64	15.39-21.39	14.46-22.8	1.7	5mm QFN	EAR99
	MFBP-00030PSM	16.19-17.72	15.96-17.94	15.27-18.55	3.16	5mm QFN	EAR99
◆	MFBP-00126CSP3*	17.2-20.56	16.91-21.05	16.16-21.98	1.9	3.5mm CSP3	EAR99
◆	MFBP-00130PSM*	17.28-18.98	16.98-19.33	16.23-20.03	2.8	5mm QFN	EAR99
	MFBC-00012PSM	17.29-23.22	16.54-23.83	15.61-25.33	1.55	5mm QFN	EAR99
◆	MFBP-00122PSM*	17.35-20.46	17.05-20.8	16.14-21.7	2	5mm QFN	EAR99
◆	MFBP-00061CSP3*	17.44-20.43	17.16-20.84	16.4-21.63	2	3.5mm CSP3	EAR99
◆	MFBP-00127CSP3*	17.45-20.43	17.03-20.71	16.26-21.86	2.5	3.5mm CSP3	EAR99
	MFBP-00036PSM	17.55-24.09	17.2-25.02	16-26.69	1.55	5mm QFN	EAR99
◆	MFBP-00070CSP3*	17.67-25.46	17.31-26.21	16.05-27.81	1.7	3.5mm CSP3	EAR99
◆	MFBP-00065CSP3*	17.84-21.98	17.55-22.42	16.38-23.53	2.2	3.5mm CSP3	EAR99
◆	MFBP-00131PSM*	18.03-19.98	17.73-20.28	16.93-20.98	2.7	5mm QFN	EAR99
	MFBP-00034PSM	18.05-21.3	17.82-21.8	17-22.47	2.25	5mm QFN	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

FIXED FILTERS, Bandpass (cont.)

Part Number	1dB Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Insertion Loss (dB)	Package	ECCN
MFBA-00002PSM	18.2-25.8	17.66-26.24	16.26-28.64	1.8	5mm QFN	EAR99
MFBC-00005PSM	18.61-25.08	18.33-25.87	16.21-27.26	1.4	5mm QFN	EAR99
◆ MFBP-00132PSM*	18.83-20.58	18.43-20.93	17.68-21.53	2.9	5mm QFN	EAR99
◆ MFBP-00123PSM*	19.43-22.4	19.09-22.78	18.15-23.72	2.1	5mm QFN	EAR99
MFBC-00013PSM	19.51-26.25	18.65-26.82	17.71-28.62	1.5	5mm QFN	EAR99
◆ MFBP-00133PSM*	19.78-21.68	19.38-21.98	18.63-22.63	3	5mm QFN	EAR99
◆ MFBP-00066CSP3*	19.82-24.07	19.38-24.4	18.38-25.83	2.2	3.5mm CSP3	EAR99
MFBP-00035PSM	20.56-24.55	20.29-25.12	19.41-26.02	2.21	5mm QFN	EAR99
◆ MFBP-00067CSP3*	21.82-26.54	21.2-26.99	20.15-28.77	2	3.5mm CSP3	EAR99
MFBC-00014PSM	22.24-29.72	21.5-30.49	20.44-32.09	1.75	5mm QFN	EAR99
MFBP-00037PSM	22.45-29.43	22.07-30.29	20.9-31.88	1.58	5mm QFN	EAR99
MFBC-00006PSM	23.64-32.1	23.26-32.94	21.04-34.56	1.6	5mm QFN	EAR99
MFBC-00015PSM	25.46-34.64	24.54-35.41	23.2-37.12	1.39	5mm QFN	EAR99
◆ MFBP-00118CSP3*	26.3-39.41	25.74-40.78	24.01-43.58	1.4	3.5mm CSP3	EAR99
◆ MFBP-00129CSP3*	27.41-29.76	26.94-30.06	25.67-32.02	2.9	3.5mm CSP3	EAR99
◆ MFBP-00128CSP3*	27.43-30.16	27.12-30.55	25.89-31.31	2.5	3.5mm CSP3	EAR99
◆ MFBP-00062CSP3*	27.5-29.86	27.2-30.28	26.33-30.91	2.8	3.5mm CSP3	EAR99
MFBP-00038PSM	27.69-34.06	27.11-35.31	26.04-36.31	2.05	5mm QFN	EAR99
MFBP-00058PSM	29.92-32	29.54-32.41	28.26-32.94	2.74	5mm QFN	EAR99
MFBC-00007PSM	30.16-39.02	29.52-40.44	25.5-42.06	1.5	5mm QFN	EAR99
MFBC-00016PSM	30.66-40.91	29.57-42.06	27.56-43.9	1.21	5mm QFN	EAR99
◆ MFBP-00072CSP3*	30.76-36.09	30.14-36.81	29.2-37.96	2.6	3.5mm CSP3	EAR99
MFBP-00028PSM	30.82-32.24	30.5-32.54	29.46-32.97	3.25	5mm QFN	EAR99
MFBP-00033PSM	31.95-33.33	31.61-33.63	30.39-34.07	3.35	5mm QFN	EAR99
MFBP-00031PSM	32.14-33.03	31.89-33.25	30.94-34.39	4.31	5mm QFN	EAR99
MFBP-00039PSM	33.08-38.38	32.08-39.95	30.93-41.18	2.46	5mm QFN	EAR99
MFBP-00027PSM	34.15-36.13	33.72-36.56	32.22-37.08	3.1	5mm QFN	EAR99
MFBP-00032PSM	35.2-36.89	34.81-37.25	33.27-37.78	3.45	5mm QFN	EAR99

LIMITERS

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Average Power Handling (W)	Peak Power Handling (W)	P1dB (dBm)	Package	ECCN
DLM-10SM¹	DC-10	0.75	Adjustable	0.5	—	+10	3mm QFN	EAR99
HLM-100001PSM¹	DC-10	0.9	+8.5@10GHz	10	—	+11	3mm QFN	EAR99
HLM-20PSM¹	DC-20	0.5	+13@20GHz	5	50	+15	4mm QFN	EAR99
HLM-40PSM¹	DC-40	0.5	+15@20GHz	2.5	9.5	+14	4mm QFN	EAR99
HLM-8010CSP1¹	DC-40	0.5	+11@20GHz	1.9	3.2	+11	1.5mm CSP1	EAR99
HLM-70CSP2¹	DC - 70	0.5	+13@40GHz	1	—	+15	2.5mm CSP2	EAR99

¹Power ratings are dependent on frequency, temperature, and pulse conditions***New Release since 3/2025**

All electrical specifications given are typical values.

IQ MIXERS

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	Package	ECCN
MMIQ-0106HCSCM	1.5-5.5	DC-3	8	33	62	5mm QFN	EAR99
MMIQ-0205HSM	1.75-5	DC-2	8	32	61	5mm QFN	EAR99
MMIQ-0218(L/H)SM	2-18	DC-3	8	27/35	58/53	6mm QFN	EAR99
MMIQ-0416(L/H)SM	4-16	DC-6	9/8.5	35/31	51	4mm QFN	EAR99
MMIQ-0520(L/H)SM	5-20	DC-6	9	35	46/39	4mm QFN	EAR99
MMIQ-0626(L/H)SM	6-26	DC-6	9	35	39/36	4mm QFN	EAR99
MMIQ-1040(L/H)SM	10-40	DC-10	9	35	50/40	4mm QFN	EAR99
MMIQ-1867(L/H)SM	18-67	DC-23	9	32/29	48.5/44	4mm QFN	EAR99

IQ MIXERS, Integrated Drive

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	LO Drive (dBm)	Package	ECCN
MMIQA-0218HPSM	2-18	DC-3	7.5	28	0 to +8	7mm QFN	EAR99
MMIQA-0626HPSM	6-26	DC-6	9	30	-2 to +8	7mm QFN	EAR99
MMIQA-1035SPSM	10-35	DC-12	9	30	0 to +8	7mm QFN	EAR99
MMIQA-1040HPSM	10-40	DC-10	9	29	0 to +8	7mm QFN	EAR99

MIXERS, Double Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
MM1-0115HPSM	1-15	DC-2.5	8	+21	+17	4mm QFN	EAR99
MM1-0212(L/H/S)SM	2-12	DC-3	8.5/8.5/9	+13/+25/+28	+9/+15/+20	4mm QFN	EAR99
MM1-0222(L/H)SM	2-22	DC-3.5	7/7.5	+11.5/+20	+11/+20	3mm QFN	EAR99
MM1-0312(H/S)SM	3-12	DC-4.5	7	+19/+24	+15/+20	3mm QFN	EAR99
MM1-0320HSM	3-20	DC-4	8	+20	+15	3mm QFN	EAR99
MM1-0424SSM	4.5-24	DC-4	8	+25	+20	3mm QFN	EAR99
MM1-0626(H/S)CSP2	6-26	DC-9	7/7.5	+20/+25	+15/+20	2.5mm CSP2	EAR99
MM1-0626(H/S)SM	6-26.5	DC-9	7.5/8	+21/+24.5	+15/+20	3mm QFN	EAR99
MM1-0726HSM	7-26.5	DC-9	7.5	+17	+20	3mm QFN	EAR99
MM1-0832(L/H)SM	8-32	DC-12	8.5/8	+11/+20.5	+9/+15	3mm QFN	EAR99
MM1-0832HPSM	8-32	DC-12	8	+23	+15	3mm QFN	EAR99
MM1-1040HPSM	10-40	DC-12	9	+20	+15	3mm QFN	EAR99
MM1-1130HSM	11-30	DC-12	7	+21	+15	3mm QFN	EAR99
MM1-1453(L/H)SM	14-53	DC-22	8/7.6	+13/+17	+13/+15	4mm QFN	EAR99
MM1-1850(H/S)SM	18-50	DC-21	8.7/9.7	+17/+28	+15/+20	4mm KFN	EAR99
MM1-1886HCSP2	18-86	DC-27	9	+20	+15	2.5mm CSP2	EAR99
MM1-2567LSM	25-67	DC-30	11	+9	+9	3mm QFN	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

MIXERS, Triple Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
MM2-0530(L/H)SM	5-30	2-20	10/9	+19/+28	+15/+20	4mm QFN	EAR99
MM2D-0528SCSM¹	5-28	DC-12	10	+31	+28	4mm QFN	EAR99
MT3-0113(L/H/S)CQG	1.5-13	0.01-7	7.5/7.5/8.5	+24/+30/+36	+15/+20/+27	CQG	EAR99
MT3D-0113LSM¹	1.5-13	see plots	7.5	+27	+17	4mm QFN	EAR99
MT3D-0325HCSM¹	3-25	DC-6	7.5	+25	+20	4mm QFN	EAR99
MT3L-0113HSM	1.5-13	0.25-5	8.5	+20	+31	4mm QFN	EAR99
MT3H-0113(L/H)SM	1.5-13	0.8-8.5	8	+22/+29	+15/+20	4mm QFN	EAR99
T3-18GLCTG(-1/-2)	0.01-18	0.001-10	7.5	+30	+20	CQG	EAR99
T3H-18GLCTG(-1/-2)	0.01-18	0.01-18	9.5	+30	+20	CQG	EAR99
T3-20GLCTG(-1/-2)	0.01-20	0.001-10	7.5	+30	+20	CQG	EAR99
T3H-20GLCTG(-1/-2)	0.01-20	0.01-18	9.5	+30	+20	CQG	EAR99

¹Differential IF

MIXERS, Integrated Drive

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
MT3A-0113HCSM	1.5-13	0.5-8.5	9.5	+28	+5 to +15	6mm QFN	EAR99
MM1A-0222HPSM	2-22	DC-3.5	7.5	+17	+3 to +15	5mm QFN	EAR99
MM1A-0622HPSM	6-22	DC-9	7.5	+21	+3 to +15	5mm QFN	EAR99
MM2A-0530HPSM	5-30	2-22	8	+25	-3 to +3	7mm QFN	EAR99
MM1A-0832HPSM	8-32	DC-12	9	+24	-6 to +6	3x4.6mm QFN	EAR99
MM1A-1040HPSM	10-40	DC-12	10	+23	+3 to +9	3x4.6mm QFN	EAR99
MM1A-1855HPSM	18-55	DC-21	9	+20	+4 to +10	3x4.6mm QFN	EAR99

ACTIVE DOUBLER

Part Number	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	Bias (V & mA)	Package	ECCN
IADA-2050PSM	10-25	20-50	25	35	5V and -0.15V @ 233 mA	4mm QFN	EAR99

PASSIVE MULTIPLIERS and NON LINEAR TRANSMISSION LINES

Part Number	Type	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	Package	ECCN
MMD-0415HPSM	Doubler	2-7.5	4-15	27	38	3mm QFN	EAR99
MMD-1030(LC/H)SM	Doubler	5-15	10-30	31/34	43/46	3mm QFN	EAR99
MMD-2050(L/H)SM	Doubler	10-25	20-50	35/33	46/40	3mm QFN	EAR99
NLTL-6794SM	Comb Generator	0.1-1	0.1-30	—	—	6mm QFN	EAR99
NLTL-6796SM	Comb Generator	0.5-3.5	0.5-50	—	—	6mm QFN	EAR99
NLTL-6273SM	Comb Generator	0.7-5	0.7-24	—	—	5mm QFN	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

POWER DIVIDERS 1:2

Part Number	Band (GHz)	Excess Loss (dB)	Amp Bal (dB)	Isolation (dB)	Type	Package	ECCN
PBR-0003SMG	0.01-3	1.5	0.8	40	High Isolation	SMG	EAR99
PBR-0006SMG	0.01-6	1.7	0.8	35	High Isolation	SMG	EAR99
PBR-0012SMG	0.01-12	1.7	1	30	High Isolation	SMG	EAR99
MPD-0R402FCSP2	0.4-2.5	0.9	0.07	20	Wilkinson	2.5mm CSP2 Front Ports	EAR99
MPD-0R402SCSP2	0.4-2.5	1	0.05	20	Wilkinson	2.5mm CSP2 Side Ports	EAR99
MPD2-00001PSM	0.4-4	0.9	0.02	16	Wilkinson	1.3x2mm DFN	EAR99
MPD-0108FCSP2	1-8	0.8	0.11	23	Wilkinson	2.5mm CSP2 Front Ports	EAR99
MPD-0108SCSP2	1-8	0.9	0.1	23	Wilkinson	2.5mm CSP2 Side Ports	EAR99
◆ MPBR-0022CSP3*	DC-22	4.6	0.1	35	High Isolation	3.5mm CSP3	EAR99
◆ MPBR-0122CSP3*	1-22	2	0.1	31	High Isolation	3.5mm CSP3	EAR99
MPD-0222FCSP2	2-22	0.6	0.05	24	Wilkinson	2.5mm CSP2 Front Ports	EAR99
MPD-0226SM	2-26.5	1.5	0.2	20	Wilkinson	4mm QFN	EAR99
MPD-0422FCSP2	4-22	0.7	0.12	24	Wilkinson	2.5mm CSP2 Front Ports	EAR99
MPD-0422SCSP2	4-22	0.9	0.17	22	Wilkinson	2.5mm CSP2 Side Ports	EAR99
PD-0434SM	4-34	1.5	0.25	20	Wilkinson	SM	EAR99
PD-0535SM	5-35	1.5	0.25	18	Wilkinson	SMG	EAR99
MPD-1260FCSP2	12-60	0.3	0.04	22	Wilkinson	2.5mm CSP2 Front Ports	EAR99
MPD-1260SCSP2	12-60	0.6	0.03	24	Wilkinson	2.5mm CSP2 Side Ports	EAR99
PD-0030SMG	DC-30	1	0.25	-	Resistive	SMG	EAR99
MPDR-0070CSP2	DC-70	1.5	0.25	-	Resistive	2.5mm CSP2	EAR99
MPDW-0670CSP2	6-70	1	0.1	24	Wilkinson	2.5mm CSP2	EAR99

POWER DIVIDERS 1:4

Part Number	Band (GHz)	Excess Loss (dB)	Amp Bal (dB)	Phase Bal (dB)	Isolation (dB)	Type	Package	ECCN
MPD4-0R404CSP2	0.4-4	3.41	0.03	0.3	20	Wilkinson	2.5mm CSP2	EAR99
MPD4-0R504CSP2	0.5-4.5	1.4	0.04	0.4	16	Wilkinson	2.5mm CSP2	EAR99
MPD4-0108CSP2	1-8	1.4	0.08	0.4	30	Wilkinson	2.5mm CSP2	EAR99
◆ MPD4-0218CSP3*	2-18	0.8	0.15	2.2	29	Wilkinson	3.5mm CSP3	EAR99
MPD4-0422CSP2	4-22	1	0.1	0.5	30	Wilkinson	2.5mm CSP2	EAR99

SWITCHES

Part Number	Band (GHz)	Insertion Loss (dB)	Isolation (dB)	IIP3 (dB)	Package	ECCN
MSW2-1002HLGA	0.1-20	0.8	44	54	2.25mm LGA	EAR99
MSW2-1001ELGA	0.1-40	0.7	43	50	2.25mm LGA	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

BARE DIE

AMPLIFIERS, Driver

Part Number	Frequency Range (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm/m)	Voltage (V)	Current (mA)	ECCN
APM-7099CH ¹	0.01-20	14	25	24	+5 to +9 VC and +5 to +9 VB	72	EAR99
APM-7098CH ¹	0.1-22	14	23	24	+5 to +9 VC and +5 to +9 VB	44	EAR99
APM-7516CH ¹	1-22	12.5	23	33	+5 VC and +5 VB	106	
ADM-9027CH	2-24	16	-	25	+2 to +3 VB and +5 to +7 VD	60	EAR99
ADM-5931CH	DC-28	11	18	27	+3 to +7 VD and -0.3 to 0 VG	85	EAR99
APM-6849CH ¹	2-30	11	21	21	+3 to +6 VC and +3 to +6 VB	21	EAR99
ADM-5974CH	DC-35	14	22	27	+3 to +7 VD and -0.3 to 0 VG	150	3A001.b.2.d
AMM-7199ACH	11-38	20	20	31	+2.5 to +3Vd and -0.6 to -0.4 VG	130	3A001.b.2.d
AMM-7200ACH	12-46	18	20.5	29	+2.5 to +3Vd and -0.6 to -0.4 VG	150	3A001.b.2.d
AMM-6702CH	21-55	25	19	-	+2 to +3Vd and -0.6 to -0.4 VG	180	3A001.b.2.d
AMM-7210ACH	22-57	14.5	20	28	+2.5 to +3Vd and -0.6 to -0.4 VG	150	3A001.b.2.d
AMM-7203CH	30-60	11.5	16	21	+1.5 to +3 VD and -0.6 to -0.4 VG	80	3A001.b.2.d
AMM-9025CH	0.0001-65	14	-	26	+6V	65	3A001.b.2.d
AMM-9024CH	DC-70	11.5	14	-	+5 VD and -0.25 VG	45	3A001.b.2.d
AMM-9893CH	45-95	18	18	-	+5 VD and -1.5 to -0.2 VG	350	3A001.b.2.h

¹Low Phase Noise

AMPLIFIERS, Gain Block and Low Noise

Part Number	Frequency (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
ADM-8096CH	0.09 - 6	22	1.5	21	33	+5 VD	58	EAR99
ADM-8095CH	0.09-10	18	1.2	18	30	+5 VD	39	EAR99
AKA-1300D	DC-14	13	5	14	28	+3.8 VD	50	EAR99
AKA-1310D	DC-14	13	5	14	28	+4.6 VD	50	EAR99
AKA-1400D	DC-14	17	4	15	28	+3.8 VD	50	EAR99
AKA-1500D	DC-14	19	4	16	28	+4.2 VD	50	EAR99
ADM-8558CH	DC-20	16	1.8	14	23	+6 VD, +3 VG	50	EAR99
ADM-8556CH	6- 20	24	1.3	16	27	+3 VD, +3VB	67	EAR99
ADM-9181CH	DC-26	14.5	3.4	22	31	+3 VB / +5 VD	130	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

ATTENUATORS

	Part Number	Band (GHz)	Attenuation (dB)	Return Loss (dB)	Note	ECCN
◆	ATN03-0040CH*	DC-40	3	25	Positive Slope	EAR99
◆	ATN06-0040CH*	DC-40	6	25	Positive Slope	EAR99
◆	ATN10-0040CH*	DC-40	10	22	Positive Slope	EAR99
◆	ATN15-0040CH*	DC-40	15	26	Positive Slope	EAR99
◆	ATN20-0040CH*	DC-40	20	30	Positive Slope	EAR99
	ATN00-0067CH	DC-67	0	33	-	EAR99
	ATN01-0067CH	DC-67	1	33	-	EAR99
	ATN02-0067CH	DC-67	2	35	-	EAR99
	ATN03-0067CH	DC-67	3	37	-	EAR99
	ATN04-0067CH	DC-67	4	36	-	EAR99
	ATN05-0067CH	DC-67	5	37	-	EAR99
	ATN06-0067CH	DC-67	6	38	-	EAR99
	ATN07-0067CH	DC-67	7	44	-	EAR99
	ATN08-0067CH	DC-67	8	42	-	EAR99
	ATN09-0067CH	DC-67	9	38	-	EAR99
	ATN10-0067CH	DC-67	10	38	-	EAR99
	ATN13-0067CH	DC-67	13	32	-	EAR99
	ATN15-0067CH	DC-67	15	34	-	EAR99
	ATN17-0067CH	DC-67	17	30	-	EAR99
	ATN20-0067CH	DC-67	20	35	-	EAR99
	ATN00-00110CH	DC-110	0	32	-	EAR99
	ATN01-00110CH	DC-110	1	33	-	EAR99
	ATN02-00110CH	DC-110	2	34	-	EAR99
	ATN03-00110CH	DC-110	3	33	-	EAR99
	ATN04-00110CH	DC-110	4	33	-	EAR99
	ATN05-00110CH	DC-110	5	32	-	EAR99
	ATN06-00110CH	DC-110	6	32	-	EAR99
	ATN07-00110CH	DC-110	7	39	-	EAR99
	ATN08-00110CH	DC-110	8	39	-	EAR99
	ATN09-00110CH	DC-110	9	30	-	EAR99
	ATN10-00110CH	DC-110	10	30	-	EAR99
	ATN13-00110CH	DC-110	13	25	-	EAR99
	ATN15-00110CH	DC-110	15	26	-	EAR99
	ATN17-00110CH	DC-110	17	29	-	EAR99
	ATN20-00110CH	DC-110	20	23	-	EAR99

BALUNS, Passive

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Impedance Ratio	Total Insertion Loss as a Mode Converter (dB)	ECCN
MBAL-1440CH	14-40	0.2	1.1	13	1:2	3	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

COUPLERS, Pick-Off Tees

Part Number	Band (GHz)	Insertion Loss (dB)	Pick-Off Loss (dB)	ECCN
PT-0067CH*	DC-67	1	15	EAR99

COUPLERS, Hybrid

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	ECCN
MQH-2R58R5CH	2.5-8.5	0.4	3	23	EAR99
MQS-0209CH	2-9	0.5	3	16	EAR99
MQH-3R510CH	3.5-10	0.4	1.5	25	EAR99
MQH-0517CH	5-17	0.5	5	23	EAR99
MQS-0218CH	2-18	1	3	17	EAR99
MQS-0418CH	4-18	0.4	0.5	16	EAR99
MQH-0920CH	9-20	0.55	2	22	EAR99
MQH-1434CH	14-34	0.7	4.5	17	EAR99
MQH-1842CH	18-42	1.5	4	15	EAR99

DIPLEXERS

Part Number	Passband Low (GHz)	Passband High (GHz)	Isolation (dB)	ECCN
MDPX-0305CH	DC-3	5-26.5	47	EAR99
MDPX-0407CH	DC-4	7-26.5	38	EAR99
MDPX-0609CH	DC-6	9-26.5	58	EAR99
MDPX-0710CH	DC-7	7-26.5	45	EAR99
MDPX-00001CH¹	DC-15.4	17.4-20.3	77	EAR99
MDPX-2330CH	DC-23	30-60	36	EAR99
MDPX-2734CH	DC-27	34-60	38	EAR99
MDPX-00002CH	DC-35	43.3-59.9	44	EAR99

¹Duplexer**EQUALIZERS, Positive Gain Slope**

Part Number	Band (GHz)	Low Freq Attenuation (dB)	Typ Return Loss (dB)	ECCN
MEQX-7ACH	DC-7	3 , 6 , 10 & 12	29, 29, 27, 29	EAR99
MEQX-14ACH	DC-14	3 , 6 & 10	23, 22, 23	EAR99
MEQX-20ACH	DC-20	3 , 5 , 6 , 7 , 10 & 11	21, 22, 21, 23, 25, 23	EAR99
MEQX-30ACH	DC-30	3 , 6 & 10	20, 20, 20	EAR99
MEQX-60ACH	DC-60	3 , 6 & 10	15, 15, 15	EAR99
MEQX-70ACH	DC-70	0 , 4 , 6 , 8 & 10	31, 31, 33, 29, 25	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

FIXED FILTERS, Lowpass

Part Number	1dB Cutoff (GHz)	3dB Cutoff (GHz)	30dB Cutoff (GHz)	Passband Return Loss (dB)	ECCN
MFLP-00007CH	1.6	2.02	2.44	26	EAR99
MFLP-00008CH	2.52	3.19	3.86	23	EAR99
MFLP-00009CH	3.36	4.2	5.12	27	EAR99
MFLP-00001CH	4.77	6.11	6.98	21	EAR99
◆ MFLP-00012CH*	7.11	9.19	10.26	25	EAR99
MFLP-00002CH	7.45	9.26	11.01	26	EAR99
MFLP-00003CH	10.27	11.95	14.7	20	EAR99
MFLP-00006CH	11.26	12.94	15.08	24	EAR99
MFLP-00004CH	12.95	15.03	18.52	24	EAR99
MFLP-00005CH	16.04	18.12	21.07	23	EAR99

FIXED FILTERS, Highpass

Part Number	1dB Cutoff (GHz)	3dB Cutoff (GHz)	30dB Cutoff (GHz)	Passband Return Loss (dB)	ECCN
MFHP-00001CH	2.56	1.95	1.42	21	EAR99
MFHP-00002CH	10.87	9.87	8.33	17	EAR99
MFHP-00003CH	16.64	15.3	13.62	15	EAR99

FIXED FILTERS, Reflectionless

Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Passband Return Loss (dB)	Stopband Return Loss (dB)	ECCN
MFQH-00001CH	18.52-21.27	18.25-21.6	17.11-22.41	25	12	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

FIXED FILTERS, Bandpass

Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Insertion Loss @ Fc (dB)	ECCN
MFBP-00116CH	1.42-2.09	1.28-2.22	1.01-2.56	2.9	EAR99
MFBP-00117CH	2.56-3.83	2.35-4.16	1.95-4.57	2.5	EAR99
MFBP-00040CH	1.62-6.78	1.35-7.51	0.95-8.52	1	EAR99
MFBP-00112CH	2.22-5.5	1.95-5.97	1.48-6.71	1.6	EAR99
MFBP-00001CH	4.7-6.11	4.57-6.31	3.83-7.25	1.3	EAR99
MFBP-00002CH	5.91-7.39	5.78-7.59	4.97-8.59	1.5	EAR99
MFBP-00084CH	5.97-9.12	5.91-9.86	5.37-10.53	2.4	EAR99
MFBP-00079CH	7.97-9.97	7.8-10.23	7.21-10.73	2.2	EAR99
MFBP-00113CH	8.52-9.86	8.38-10.13	7.85-10.46	2.8	EAR99
◆ MFBP-00137CH*	7.65-12.87	7.38-13.81	6.98-14.75	2	EAR99
MFBP-00041CH	5.3-19.24	4.7-20.58	4.03-23.32	1	EAR99
MFBA-00004CH	8.47-12.24	7.97-12.45	7.17-13.78	1.9	EAR99
MFB-1100CH	9.39-12.4	8.89-12.91	7.04-16.26	1.4	EAR99
MFBP-00080CH	9.97-11.98	9.81-12.24	9.14-12.74	2.2	EAR99
MFBP-00085CH	8.85-13.68	8.65-15.08	7.98-16.02	2.2	EAR99
MFBP-00114CH	10.13-13.54	9.79-14.08	9.25-14.55	2	EAR99
MFBA-00003CH	10.23-14.08	9.77-14.37	8.84-15.46	2.1	EAR99
MFBP-00026CH	10.07-14.7	9.8-15.1	9.2-16.1	1.2	EAR99
MFBP-00081CH	11.98-13.91	11.82-14.16	11.15-14.75	2.4	EAR99
MFBP-00054CH	11.06-16.96	10.86-17.49	9.72-19.1	1.4	EAR99
◆ MFBP-00138CH*	11.06-17.49	10.26-18.5	9.66-19.71	1.6	EAR99
MFBP-00043CH	12.14-18.16	11.8-18.63	10.8-20.64	1.4	EAR99
MFBP-00082CH	14.08-16	13.83-16.26	13.41-16.76	2.4	EAR99
MFBP-00086CH	12.6-17.9	12.2-18.5	11.53-19.24	1.6	EAR99
MFB-1600CH	12.07-18.93	11.73-19.77	9.39-24.63	1.2	EAR99
MFBB-00001CH	14.66-15.63	14.45-15.8	13.99-16.63	2.6	EAR99
MFBP-00115CH	14.14-17.63	13.74-18.1	13.14-18.63	2.2	EAR99
MFBA-00001CH	14.12-17.89	13.78-18.22	12.7-18.98	2.4	EAR99
MFBP-00025CH	13.22-19.39	12.88-19.86	12.01-21.27	1.2	EAR99
MFBP-00048CH	15.15-17.29	14.95-17.63	12.54-18.3	2	EAR99
MFBP-00083CH	16.09-17.93	15.84-18.26	15.33-18.68	2.5	EAR99
MFBP-00052CH	14.68-23.59	14.41-24.26	13.01-26.87	1.4	EAR99
MFBP-00053CH	15.82-22.65	15.55-23.12	14.14-25.06	1.4	EAR99
MFB-2025CH	16.76-24.46	16.09-25.63	12.74-31.33	1.4	EAR99
MFBP-00044CH	17.9-24.46	17.49-24.93	15.95-26.87	1.5	EAR99
MFBP-00070CH	17.49-25.8	17.09-26.61	16.02-27.94	1.5	EAR99
MFBP-00002CH	20.32-23.12	19.98-23.41	18.98-26.18	1.6	EAR99
MFBB-00002CH	18.22-25.84	17.76-26.35	16.21-28.19	1.8	EAR99
MFB-2500CH	16.42-28.82	15.75-32	9.72-33.84	1.3	EAR99
MFBP-00024CH	18.79-25.76	17.75-26.3	16.77-28.78	1.4	EAR99
MFBP-00089CH	17.9-27.54	17.56-28.55	16.36-30.16	1.6	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

FIXED FILTERS, Bandpass (cont.)

Part Number	1dBc Passband (GHz)	3dBc Passband (GHz)	30dBc Rejection Point (GHz)	Insertion Loss @ Fc (dB)	ECCN
MFBP-00068CH	17.7-28.82	17.36-29.89	15.95-31.9	1.4	EAR99
MFB-2400CH	19.44-26.97	18.6-27.98	11.4-29.99	1.5	EAR99
MFBP-00100CH	21.53-29.82	21.03-30.66	19.94-32.17	1.7	EAR99
◆ MFBP-00134CH*	21.85-29.49	21.18-30.22	20.24-31.7	1.9	EAR99
MFB-2625CH	21.78-30.32	20.78-31.66	16.92-38.86	1.4	EAR99
MFBP-00042CH	17.7-38.93	17.16-41.74	14.75-46.37	1.8	EAR99
MFBP-00045CH	24.06-28.68	23.39-29.42	22.32-30.62	2	EAR99
MFBP-00056CH	21.85-33.37	21.45-34.17	18.9-38.46	1.3	EAR99
MFBP-00055CH	22.25-33.17	21.92-33.84	20.04-37.06	1.3	EAR99
MFBP-00023CH	25-33.3	24-33.7	22.94-35.68	1.7	EAR99
MFBP-00071CH	25.6-33.37	25.2-34.31	23.79-35.72	1.4	EAR99
MFB-3450CH	23.29-40.04	22.45-44.89	14.58-48.08	1.1	EAR99
MFBP-00101CH	27.56-34.17	26.81-34.93	25.72-36.35	2.1	EAR99
◆ MFBP-00135CH*	27.88-33.84	27.21-34.44	26.07-35.78	2.5	EAR99
MFB-3175CH	26.81-36.52	25.8-37.86	21.95-45.9	1.5	EAR99
MFBP-00118CH	25.67-38.46	25.2-40.14	23.19-43.55	1.5	EAR99
MFBP-00046CH	28.28-35.45	27.68-36.45	26.14-38.06	1.7	EAR99
MFB-3300CH	26.3-39.37	25.38-40.79	18.35-45.06	1.5	EAR99
MFB-3325CH	32.17-34.17	31.66-34.68	27.14-38.7	2.3	EAR99
MFBP-00072CH	30.69-36.05	30.22-36.79	29.08-37.99	1.8	EAR99
MFBP-00069CH	28.21-39.87	27.27-40.87	25.73-43.02	1.7	EAR99
MFB-3475CH	29.65-39.53	28.65-40.71	23.29-48.75	2	EAR99
MFBP-00087CH	29.75-39.74	29.28-40.81	27.68-42.75	1.6	EAR99
MFBP-00050CH	33.77-35.92	33.44-36.25	32.37-36.85	2.9	EAR99
◆ MFBP-00136CH*	32.03-39.13	31.56-40.07	30.22-41.74	1.8	EAR99
MFBP-00102CH	32-39.28	31.58-40.62	30.24-42.63	1.9	EAR99
MFBP-00073CH	34.11-37.26	33.77-37.79	32.3-38.66	2.6	EAR99
MFBP-00022CH	31.19-40.98	30.05-41.79	28.31-44.13	1.6	EAR99
MFBP-00047CH	34.44-40.2	34.04-41.14	32.77-42.41	2.1	EAR99
MFBP-00119CH	32.5-43.08	32.1-44.56	30.36-46.84	1.68	EAR99
MFBP-00057CH	30.49-46.23	29.95-47.24	27.14-51.26	1.5	EAR99
MFBP-00075CH	36.39-39.8	35.98-40.4	34.58-41.28	2.5	EAR99
MFBP-00051CH	36.79-40	36.39-40.67	34.91-41.54	2.5	EAR99
MFBC-00017CH	35.42-48.89	34.13-49.92	31.87-52.47	1.5	EAR99
MFBC-00008CH	37.15-50.42	36.44-52.14	29.36-54.65	1.5	EAR99
MFB-5350CH	40-67	33.51--	20.19--	0.9	EAR99
MFBP-00103CH	44.14-51.17	43.39-52.01	42.3-53.35	2.7	EAR99
MFBC-00018CH	45.44-61.28	43.61-63.25	40.83-66.93	1.9	EAR99
MFBC-00009CH	46.9-62.44	46.1-64.72	40.4--	2.3	EAR99
MFBC-00019CH	59.13-78.03	57.34-83.33	53.56-86.56	2.7	EAR99
MFBC-00020CH	77.35-107.8	76.1-112	63.05--	3.6	EAR99

***New Release since 3/2025**

All electrical specifications given are typical values.

LIMITERS

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Average Power Handling (W)	Peak Power Handling (W)	P1dB (dBm)	ECCN
HLM-100001CH ¹	DC-10	0.8	+8.5@10GHz	10	—	+11	EAR99
HLM-8011CH ¹	DC-30	0.4	+7@30GHz	1	4.5	+10	EAR99
HLM-40CH ¹	DC-40	0.5	+16@20GHz	4	20	+15	EAR99
HLM-70CH ¹	DC-70	0.8	+9@40GHz	4	20	+9	EAR99

¹Power ratings are dependent on frequency, temperature, and pulse conditions

IQ MIXERS

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	ECCN
MMIQ-0218(L/H)CH	2-18	DC-3	8/7.5	27/35	58/53	EAR99
MMIQ-0416(L/H)CH	4-16	DC-6	9	28/29	58/59	EAR99
MMIQ-0520(L/H)CH	5-20	DC-6	9	35	46	EAR99
MMIQ-0626(L/H)CH	6-26	DC-6	9	35	41	EAR99
MMIQ-1037HCH	10-37	DC-12	9	25	47	EAR99
MMIQ-1040(L/S)CH	10-40	DC-12	9	25	47/44	EAR99
MMIQ-1865(L/H/S)CH	18-65	DC-23	9	35	49/48/50	EAR99
MMIQ-40100(L/H)CH	40-100	DC-20	10	30	see datasheet	EAR99
MMIQ-30120HCH ¹	30-120	DC-30	8.5	27	40	EAR99

¹Differential IF IQ Mixer

MIXERS, Double Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
MM1-0115HCH	1-15	DC-2.5	7.5	+21	+17	EAR99
MM1-0212(L/H/S)CH	2-12	DC-3	8/8.5/8.5	+13/+23/+26	+9/+15/+20	EAR99
MM1-0222(L/H)CH	2-22	DC-3.5	8.5	+12/+20	+9/+15	EAR99
MM1-0312(H/S)CH	3-12	DC-4.5	7.5	+19/+24	+15/+20	EAR99
MM1-0320(L/H)CH	3-20	DC-4	8	+10/+20	+7/+15	EAR99
MM1-0330(H/T)CH	3-30	DC-5	7/9	+21/+32	+19/+23	EAR99
MM1-0424SCH	4.5-24	DC-4	8	+25	+20	EAR99
MM1-0626(H/S)CH	6-26.5	DC-9	7.5/8	+21/+25	+15/+20	EAR99
MM1-0832(L/H)CH	8-32	DC-12	8/7.5	+14/+23	+9/+15	EAR99
MM1-1044(L/H)CH	10-44	DC-14	7.5	+13/+22	+9/+15	EAR99
MM1-1140HCH	11-40	DC-12	8	+21	+15	EAR99
MM1-1240SCH	12-40	DC-12	8	+25	+20	EAR99
MM1-1467(L/H)CH	14-67	DC-21	7	+12/+18	+13/+15	EAR99
MM1-1850(H/S)CH	18-50	DC-20	8/8.5	+21/+25	+15/+20	EAR99
MM1-1857(L/H)CH	18-57	DC-21	8/7.5	+13/+20	+9/+13	EAR99
MM1-2567LCH	25-67	DC-30	9	+9	+13	EAR99
MM1-30100LCH	30-100	DC-20	8.5	see datasheet	+14	EAR99
MM1-35130HCH	35-130	DC-50	8	see datasheet	+12	EAR99
MMH-35120HCH ¹	35-120, 12-40	DC-14	18	+7	+15	3A001.b.7.c.1

¹Harmonic Mixer

***New Release since 3/2025**

All electrical specifications given are typical values.

MIXERS, Triple Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
MM2-0530(L/H)CH	5-30	2-20	10/9	+19/+28	+15/+20	EAR99
MT3A-0113HCH¹	1-13	0.5-8.5	8.5	+28	+8	EAR99
MT3L-0113HCH	1.5-13	0.25-5	8.5	+31	+20	EAR99
MT3H-0113(L/H)CH	1.5-13	0.8-8.5	8/8.5	+20/+28	+15/+20	EAR99

¹Integrated low phase noise driver amplifier

ACTIVE DOUBLER

Part Number	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	Bias (V & mA)	ECCN
IADA-2050CH	10-25	20-50	24	21	5V @ 233 mA	EAR99

PASSIVE MULTIPLIERS and NON LINEAR TRANSMISSION LINES

Part Number	Type	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	ECCN
MMD-0415HCH	Doubler	2-7.5	4-15	27	36	EAR99
MMD-1030(L/H)CH	Doubler	5-15	10-30	38/41	46/47	EAR99
MMD-1648LCH	Doubler	8-24	16-48	44	69	EAR99
MMD-1250HCH	Doubler	6-25	12-50	32	40	EAR99
MMD-2060(L/H)CH	Doubler	10-30	20-60	37/38	41/40	EAR99
MMD-3580LCH	Doubler	17.5-40	35-80	38	44	EAR99
MMD-20100HCH	Doubler	10-50	20-100	24.5	33	3A001.b.7.b.1
MMD-40120HCH	Doubler	20-60	40-120	30	40	3A001.b.7.b.1
MMQ-40125HCH	Quadrupler	10-31.25	40-125	19	12	3A001.b.7.b.1
NLTL-6273CH	Comb Generator	0.7-5	0.7-40	—	—	EAR99
NLTL-6275CH	Comb Generator	3-15	3-85	—	—	EAR99

POWER DIVIDERS 1:2

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Excess Insertion Loss (dB)	Isolation (dB)	Type	ECCN
MPD-0R502CH	0.5-2	0.02	0.1	1.1	20	Wilkinson	EAR99
MPD-0226CH	2-26.5	0.2	2	1	20	Wilkinson	EAR99

SWITCHES

Part Number	Band (GHz)	Insertion Loss (dB)	Isolation (dB)	IIP3 (dBm)	ECCN
◆ MSW2-00001CH*	2-26	0.8	52	41	EAR99
◆ MSW2-00002CH*	4-50	1	48	41	EAR99
◆ MSW2-00003CH*	6-67	1.3	48	41	EAR99
◆ MSW2-00004CH*	9-100	1.5	50	41	EAR99

*New Release since 3/2025

All electrical specifications given are typical values.

MARKI MICROWAVE PART NUMBER DECODER RING

Example: MT3H-0113LCQG-2

Prefix=MT3H, Identifier=0113, Diode=L, Package=CQG, Suffix=-2

PREFIX

1 to 4 letters to identify the product category (**BAL**=balun, **PD**=power divider, etc)

- MMICs: M prefix (ex: **MBAL**, **MM1**, **MT3**)
- Modifiers: ex: MT3**A** Integrated LO Driver Amplifier
- EVAL, EVB: evaluation boards of SMT components (ex: **EVAL**-MM1-0212H)

IDENTIFIER

Most part numbers include a 4-digit string that identifies start/stop frequencies (ex: **0416** = 4 to 16 GHz), with a few exceptions:

- Exceptions: amplifiers and NLTs have the chip number instead of frequency band

DIODE

Found on mixers, IQ mixers and multipliers. LO Drive is given at typical value.

- **L** diode: Vf=0.25V, LO Drive +5 to +15 dBm
- **H** diode: Vf=0.75V, LO Drive +11 to +20 dBm
- **S** diode: Vf=1.4V, LO Drive +17 to +23 dBm
- **T** diode: Vf=2V, LO Drive +20 to +27 dBm

PACKAGES

- MMIC SMTs: **SM** (surface mount), **PSM** (plastic substrate), **CSM** (ceramic substrate), **CSP1**, **CSP2**, **CSP3** (chip scale package), **LGA** (land grid array) or **CH** (chip/bare die)
- Hybrid surface mounts: **CTG**, **CQG**, **SM**, **SMG**, **SLG**, **SSG**, etc
- Connectorized
 - Bullet Housing: **BH**
 - Sub-30GHz MMIC: typically **S**
 - mmWave modules: **M**, **M2**, **U**, **UA**, **UB**, **UC**, etc
- Evaluation boards: **EVAL**, **EVB**

LAYOUT CONFIGURATION

- Mixers are generally offered in **-2** layout, but some are offered in a mirrored layout **-1** (ex: MM1-1467LCH-**1** and MM1-1467LCH-**2**)

CONNECTOR OPTIONS: swaps are available upon request

- SMA
- 2.92 mm
- 2.4 mm
- 1.85 mm
- 1 mm

WAVEGUIDE DECODER

Prefix: **ADA** = Active Doubler, **AQA** = Active Quadrupler, **ASA** = Active times Six

ADA-xxX00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **X** 1-digit string identifying : **F** = Full band **N**= Narrow band

Prefix: **ATN** identifies Attenuator product family

ATNXX-xxFX00WG:

- **XX** is a 2-digit string identifying the attenuation value
- Identifier: **xx** 2-digit string identifying the frequency band of operation. (ex: 10 = WR-10)
- **FX** identifies Fixed Attenuator, **X** = **L** for Low and **H** for High power; **LS** identifies Level Set Attenuator

Prefix: **C** identifies Coupler product family

CXX-xx00WG:

- **XX** identifier is coupling value (ex: 10, 20, 30 or 40 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: **DET** identifies Detector product family

DET-xxPP00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Output: SMA Female
- **PP** Identifier is Polarity: Positive

Prefix: **ISO** identifies Isolator product family

ISO27-xxF00WG:

- **XX** identifies isolation value (ex: 27 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: **PD** identifies Power Divider product family

PD20-xx00WG:

- **XX** = Output to Output isolation value. (ex: 20 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: **TW** identifies Termination product family

TW50-xxX00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier **X** = **H** for high Power, **L** for Low Power
- Connector options: UG-387, UG-385, UG-383 and UG-599

Prefix: **WE** identifies Waveguide E plane bend product family

WEXX-xx00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: **WH** identifies Waveguide H plane bend product family

WHXX-xx00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: **WS** identifies Waveguide Straight product family

WS-xx00XXXWG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **XXX** 3-digit string identifying length in inches (ex: 3 inches=300)
- Identifier: **XXX** the last X in string will identify if the flange is Square (**S**) or Round (**R**)

Prefix: **WT** identifies Waveguide Twist product family

WTXX-xxX00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **X** 1-digit string identifying **L** for left and **R** for right hand twist

PERFORMANCE THAT SEEMS UNREAL

Introducing Prodigy™ Filter Designer

Go from Ordinary to Extraordinary RF/Microwave Development

RF systems have unique frequency plans and utilize RF filters to select bands of interest and reject unwanted signals. This often drives the need for custom filters and an iterative system optimization process, resulting in costly engineering time and longer design cycles.

Generate instantaneous 3D FEM quality MMIC filter designs with Prodigy™, the new automated filter design tool from Marki Microwave. Powered by advanced FEM modeling and machine learning techniques, Prodigy puts MMIC filter design into the customer's hands.



- Generate accurate, custom MMIC filter designs with instant access to s2p files
- Enables fast, iterative system optimization
- Cost-effective & streamlined delivery of products

START DESIGNING AT

www.markimicrowave.com/technical-resources/tools/filter-prodigy



MARKI MICROWAVE

is proud to provide world-class support including direct access to engineers, downloadable device models for ADS®, SystemVue®, Microwave Office®, Modelithics®, Quantic X-Microwave®; and evaluation modules for our MMIC bare die and surface mount products.

Online Tech Support:

- Extensive Knowledge Base with Tech Notes
- Application Notes
- Detailed White Papers
- Prodigy™ Filter Designer, RF Design Tools, Calculators and Converters
- Email us at support@markimicrowave.com



Marki Microwave's range of components are available in the UK and Ireland from APC Technology Group.

Our Electronic Products and Components team provide pricing information, access to data sheets and dedicated technical support and guidance to help you find the solutions you need for your projects.

www.apctech.com
0330 313 3220 | rf@apctech.com

innovation here... We're all mad about



USA DESIGNED
MANUFACTURED
SUPPORTED

Copyright © 6/2025 Marki Microwave, Inc. All Rights Reserved.