

Power Divider 2 Way
750 to 4000MHz SMA Female 30W



RoHS Compliant

Part Number: AT30A-007040G-2-AF

Page 1 of 2

Electrical Specification

Parameter	Unit	Specification
Frequency Range	GHz	750 ~ 4000
Insertion Loss	dB	≤1.2 (Excluding theoretical loss 3.0 dB)
Input VSWR	:1	≤1.25
Output VSWR	:1	≤1.20
Isolation	dB	≥20
Amplitude Balance	dB	±0.2
Phase Balance	°	±3
Power Handling CW	W	30
Reverse Power	W	2

Mechanical Specification


Parameter	Specification
Connectors	SMA Female all ports
Surface Finish	Black Paint

Environmental

Parameter	Specification
Operating Temperature	-55°C ~ +85°C

28/08/2024

Dimensions Units: mm (inches)

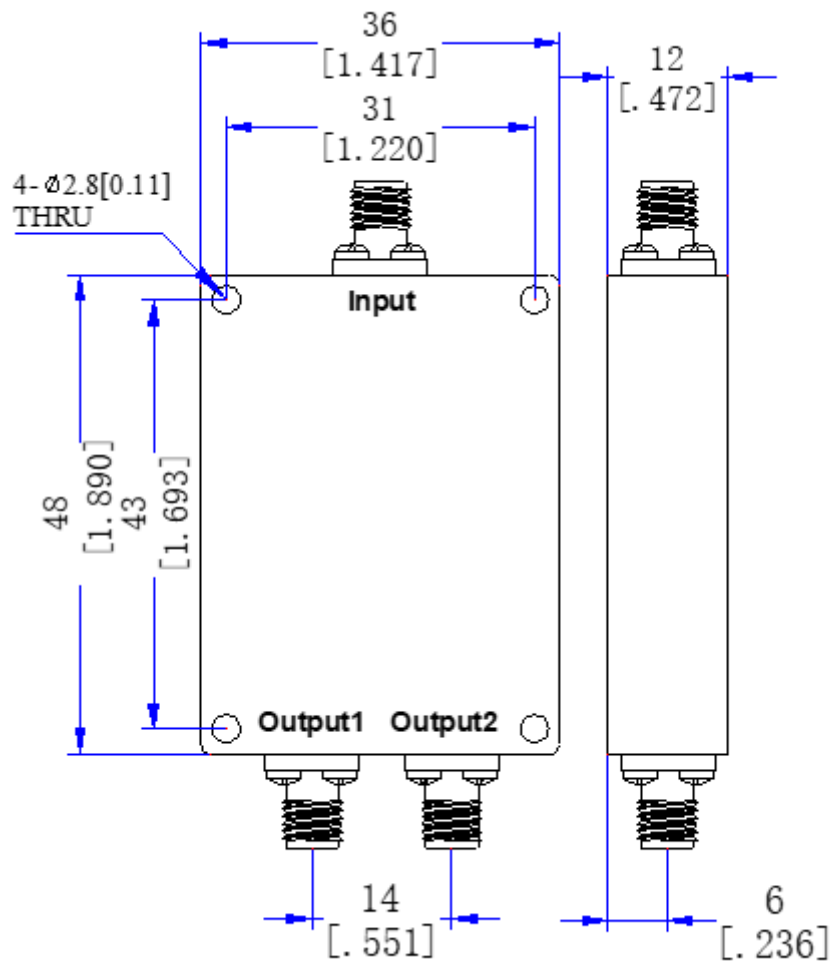

28/08/2024