

Adaptor
SMA Male to SMA Female Right Angle**Part Number: AT36B-4041-G**

Page 1 of 2

Electrical Specification


Parameter	Unit	Specification
Interface Frequency max.	GHz	18
Impedance	Ω	50
VSWR	-	1.07 +0.010 x FGHz
Insertion Loss	dB	0.06 dB x $\sqrt{\text{FHz}}$
Working Voltage	V	1000
Centre Conductor Resistance	m Ω	≤ 3.0
Outer Conductor Resistance	m Ω	≤ 2.0
Insulation Resistance	M Ω	>5000

Mechanical Specification

Parameter	Unit	Specification
Outer Conductor		Gold Plated over Brass
Centre Conductor	-	Gold Plated over Beryllium Copper
Insulator	-	PTFE
Durability	-	500 Cycles
Temperature Range	$^{\circ}\text{C}$	-40 ~ +125
Interface N	-	MIL-C-39012

26/02/2016

Dimensions (Units: mm)

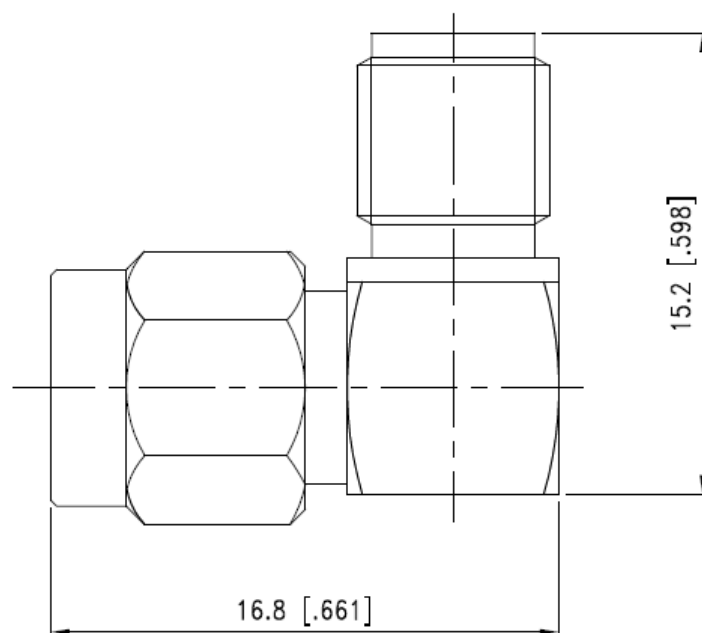

26/02/2016