

Adaptor
SMA Male to SMA Female Bulkhead



RoHS Compliant

Part Number: AT36C-4041-N-1

Page 1 of 2

Electrical Specification

Parameter	Unit	Specification
Interface Frequency max.	GHz	18
Impedance	Ω	50
VSWR	:1	≤ 1.20
Insertion Loss	dB	< 0.1
Working Voltage	V	1500
Centre Conductor Resistance	m Ω	≤ 3.0
Outer Conductor Resistance	m Ω	≤ 2.0
Insulation Resistance	M Ω	> 5000

Mechanical Specification


Parameter	Specification
Outer Conductor	Nickel Plated over Brass
Centre Conductor	Gold Plated over Beryllium Copper
Insulator	PTFE
Durability	500 Cycles
Interface SMA	MIL-C-39012
RoHS 3 Compliant	Yes
Torque Settings	0.79Nm ~ 1.12Nm

Environmental

Parameter	Specification
Temperature Range	-55°C ~ +155°C

26/02/2016

Dimensions (Units: mm)

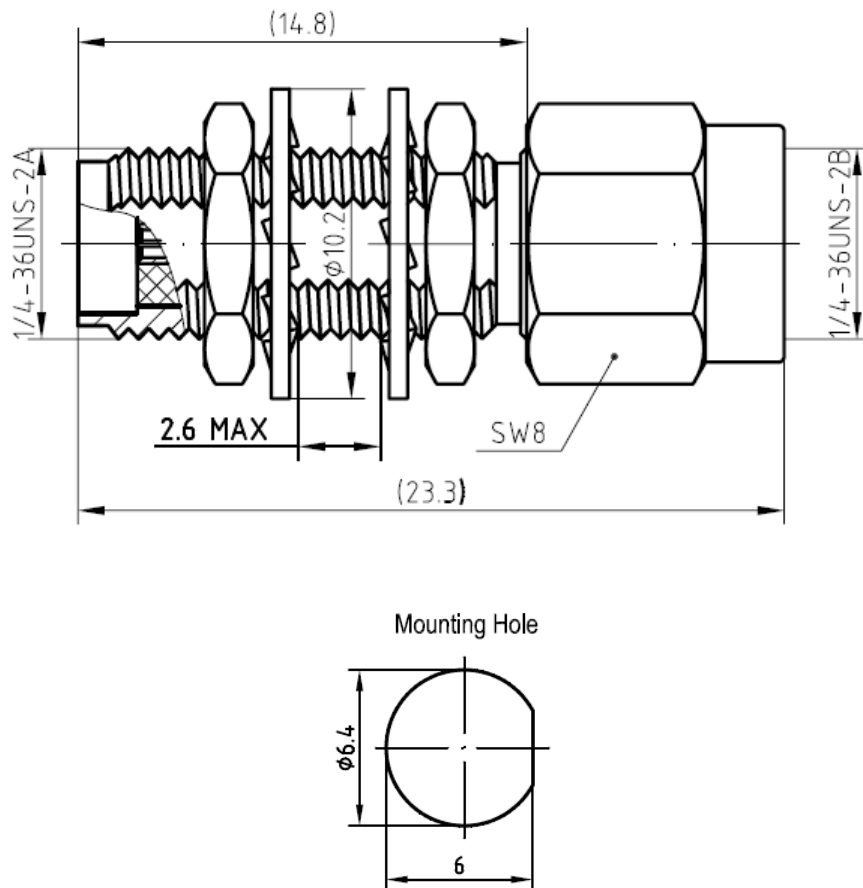

26/02/2016