

Connector
SSMA Female thread-in



Part Number: AT37P-47861-B-95P

Page 1 of 1


Electrical Specification

Parameter	Unit	Specification
Frequency Range	GHz	0 ~ 36
Impedance	Ω	50
VSWR	-	≤ 1.35
Low RF Leakage	dB	< -100
Insulation Resistance	M Ω	> 1000

Mechanical Specification

Parameter	Unit	Specification
Outer Conductor		Passivated Stainless Steel
Centre Conductor		Beryllium Copper, gold plated
Insulator		PTFE
Durability		500 Cycles
Temperature Range	$^{\circ}\text{C}$	$-45 \sim +125$
Interface		MIL-STD-348A

Dimensions (Units: mm)

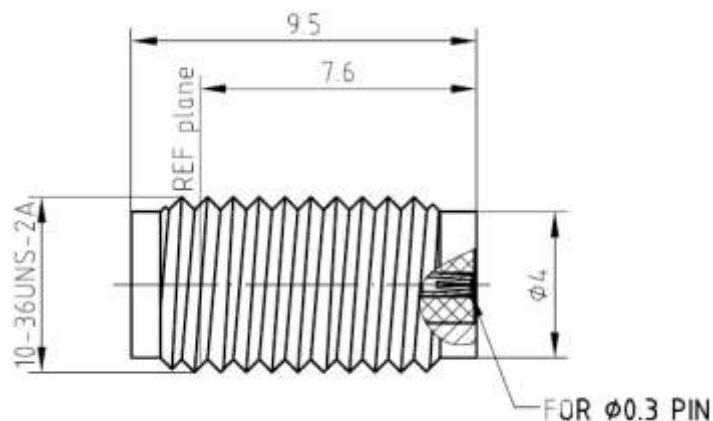

26/02/2016