

Connector
SMA Receptacle (Blunt Post Contact) Connectors



RoHS Compliant

Part Number: AT37PBP-41F34F03-102

Page 1 of 2

Electrical Specification

Parameter	Unit	Specification
Frequency Range	GHz	0 ~ 27
VSWR	:1	1.15 max
Dielectric Withstanding Voltage	V	1500
Impedance	Ω	50

Mechanical Specification


Parameter	Specification
Housing	Stainless Steel SU303 (Polished/Passivated)
Centre Contact	Beryllium Copper, Gold Plated (MIL-G-45204)
Insulators	PEI & PTFE
Durability	500 Cycles
Interface	SMA Per MIL-STD-348A

Environmental

Parameter	Specification
Temperature Range	-55°C ~ +165°C

17/08/2018

Dimensions Units: mm (inches)

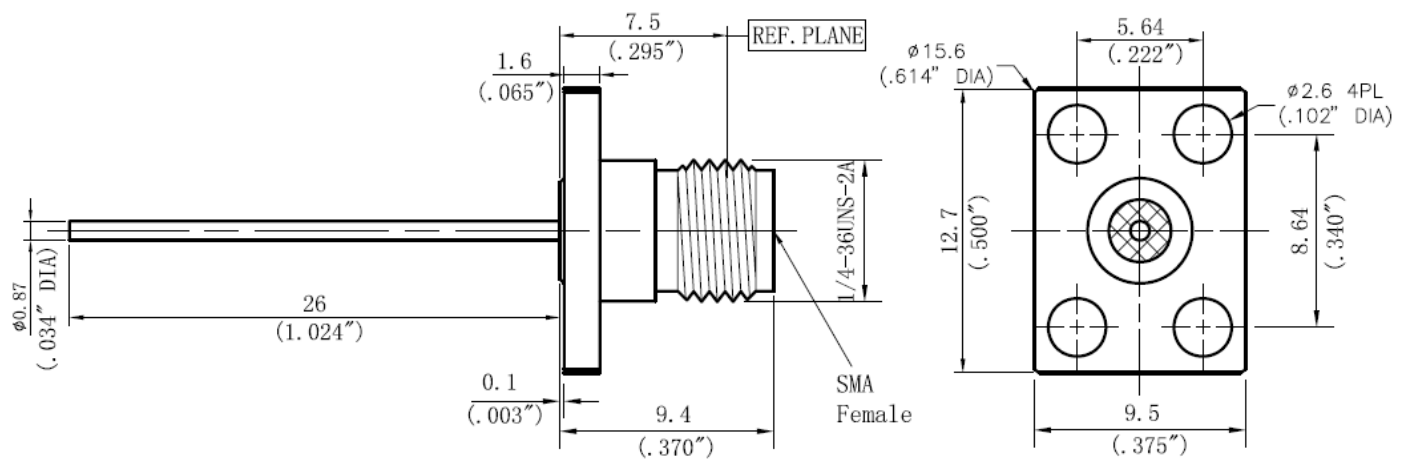

17/08/2018